

HOW TO SELECT A TYRE

Tyre size and maximum speed of the vehicle.
The maximum load capacity per axle (Load index).
Your style driving and road condition.

MOUNTING & DISMOUNTING

Only get qualified people to mount or dismount your tyres.

TYRE PRESSURE

For safe and economical driving, it is extremely important to drive with the correct tyre pressure.

CHECK THE FOLLOWING ITEMS REGULARLY

Tread Pattern


Unusual wear, tread groove separation, bulges.. etc.

Sidewall

Impact, Bulges, Ozone cracking, vehicle contact damage etc.

Pressure

The inflated pressure will be changed during long driving and changed circumstances temperature.



DISTRIBUTED BY

www.sd-international.com

These data can be changed by the manufacturer without prior notice and differently applied by regions.

www.zeta-tyres.com



ZETA

Printed on Jun. 2021

POWERED BY PERFORMANCE

2021 Products Manual



WHY ZETA

OUTSTANDING VALUE BACKED BY WORD LEADING INDUSTRY 4.0 MANUFACTURING.

State of the art manufacturing facility, only opened in 2008.

Design engineering from Europe, using the most up to date design technology available.

All size tested & approved according to Regulation of (EU) No.2020/740 and registered by EPREL regarding Wet Grip ,Rolling Resistance, External Noise , Snow Grip & Ice Grip which Stipulated by Europe Union.

Certification for each market are available.

Full coverage of Quality Warranty and Products Liability Insurance.

Exclusive distribution arrangements available.

Direct factory program, ensuring regular, steady supply and competitive price.

Full market support to develop your business.

Over 400 sizes already available, with many more to be introduced in near future.

Professional customer service.

PRODUCTS

PASSENGER TYRES



WINTER TYRES



Studless Studless Studless Studable Studable

ALL WEATHER TYRES





- Modern asymmetric design, outer longitudinal grooves to reduce aquaplaning risk, leading to safety on wet conditions.
- Inner inclined grooves to increase lateral grip and reduce noise, leading to outstanding traction & riding comfort.
- Improved lateral rigidity at high speed with high levels of handling.

Size	Loading Index	Speed	Max. Speed Km/h MPH	Max. Pressure S(kpa) S(psi)	Max. Load S (kg) S (lb)				
195/65R15	91	V	240 149	300 44	615 1356	C	B	71	B
195/65R15	95 XL	H	210 130	340 49	690 1521	C	B	72	B
205/65R15	94	H	210 130	300 44	670 1477	B	B	71	B
195/60R16	89	H	210 130	300 44	580 1279	C	B	71	B
205/60R16	96 XL	V	240 149	340 49	710 1565	B	B	72	B
205/60ZRF16 RFT	92	W	270 168	300 44	630 1389	D	B	71	B
215/60R16	95	V	240 149	300 44	690 1521	B	B	71	B
225/60R16	98	H	210 130	300 44	750 1653	B	B	71	B
195/55R15	85	V	240 149	300 44	515 1135	C	B	71	B
195/55ZR16	91 XL	W	270 168	340 49	615 1356	B	B	72	B
195/55RF16 RFT	87	V	240 149	300 44	545 1201	D	B	71	B
205/55ZR16	91	W	270 168	300 44	615 1356	B	B	71	B
205/55ZRF16 RFT	91	W	270 168	300 44	615 1356	D	B	71	B
215/55ZR16	97 XL	W	270 168	340 49	730 1609	B	B	72	B
225/55ZR16	99 XL	W	270 168	340 49	775 1709	B	B	72	B
225/55ZRF16 RFT	95	W	270 168	300 44	690 1521	D	B	71	B
205/55ZR17	95 XL	W	270 168	340 49	690 1521	C	B	72	B
205/55RF17 RFT	91	V	240 149	300 44	615 1356	D	B	71	B
215/55ZR17	98 XL	Y	300 186	340 49	750 1653	B	B	72	B
225/55ZR17	101 XL	W	270 168	340 49	825 1819	B	B	72	B
225/55ZRF17 RFT	97	Y	300 186	300 44	730 1609	D	B	71	B
235/55ZR17	103 XL	Y	300 186	340 49	875 1929	B	B	72	B
225/55ZR18	102 XL	W	270 168	340 49	850 1874	B	B	72	B
195/50R15	82	V	240 149	300 44	475 1047	C	B	71	B
205/50ZR17	93 XL	Y	300 186	340 49	650 1433	C	B	72	B
205/50ZRF17 RFT	89	W	270 168	300 44	580 1279	D	B	71	B
215/50ZR17	95 XL	Y	300 186	340 49	690 1521	B	B	72	B
225/50ZR17	98 XL	Y	300 186	340 49	750 1653	B	B	72	B
225/50ZRF17 RFT	94	W	270 168	300 44	750 1653	D	B	71	B
235/50ZR17	100 XL	W	270 168	340 49	800 1764	B	B	72	B
195/45R16	84 XL	V	240 149	340 49	500 1102	C	B	72	B
215/45ZR16	86	W	270 168	300 44	530 1168	C	B	71	B
205/45ZR17	88 XL	Y	300 186	340 49	560 1235	C	B	72	B
205/45ZRF17 RFT	88 XL	W	270 168	340 49	560 1235	D	B	72	B
215/45ZR17	91 XL	Y	300 186	340 49	615 1356	B	B	72	B
225/45ZR17	94 XL	W	270 168	340 49	670 1477	B	B	72	B
225/45ZRF17 RFT	94 XL	W	270 168	340 49	670 1477	D	B	72	B
235/45ZR17	97 XL	Y	300 186	340 49	730 1609	B	B	72	B
225/45ZR18	95 XL	Y	300 186	340 49	690 1521	B	B	72	B
225/45ZRF18 RFT	91	Y	300 186	300 44	615 1356	D	B	71	B
235/45ZR18	98 XL	Y	300 186	340 49	750 1653	B	B	72	B
245/45ZR18	100 XL	W	270 168	340 49	800 1764	B	B	72	B
245/45ZRF18 RFT	96	Y	300 186	300 44	810 1786	D	B	71	B

Size	Loading Index	Speed	Max. Speed Km/h MPH	Max. Pressure S(kpa) S(psi)	Max. Load S (kg) S (lb)				
255/45ZR18	103 XL	Y	300 186	340 49	875 1929	B	B	73	B
255/45ZRF18 RFT	103 XL	Y	300 186	340 49	875 1929	D	B	73	B
225/45ZR19	96 XL	Y	300 186	340 49	710 1565	B	B	72	B
225/45ZRF19 RFT	92	W	270 168	340 49	710 1565	D	B	71	B
235/45ZR19	99 XL	Y	300 186	340 49	775 1709	B	B	72	B
235/45RF19 RFT	95	V	240 149	300 44	690 1521	D	B	71	B
245/45ZR19	102 XL	Y	300 186	340 49	850 1874	B	B	72	B
245/45ZRF19 RFT	102 XL	Y	300 186	340 49	850 1874	D	B	72	B
255/45ZR20	105 XL	Y	300 186	340 49	925 2039	B	B	73	B
255/45ZRF20 RFT	105 XL	W	270 168	340 49	925 2039	D	B	73	B
265/45ZR20	104	W	270 168	300 44	900 1984	B	B	72	B
215/40ZR17	87 XL	Y	300 186	340 49	545 1201	B	B	72	B
215/40ZR18	89 XL	Y	300 186	340 49	580 1279	B	B	72	B
215/40ZRF18 RFT	85	Y	300 186	300 44	515 1135	D	B	71	B
225/40ZR18	92 XL	Y	300 186	340 49	630 1389	B	B	72	B
225/40ZRF18 RFT	92 XL	Y	300 186	340 49	630 1389	D	B	72	B
235/40ZR18	97 XL	Y	300 186	340 49	730 1609	B	B	72	B
245/40ZR18	97 XL	Y	300 186	340 49	730 1609	B	B	72	B
245/40ZRF18 RFT	93	Y	300 186	300 44	650 1433	D	B	71	B
255/40ZR18	99 XL	Y	300 186	340 49	775 1709	B	B	73	B
255/40ZRF18 RFT	95	W	270 168	300 44	690 1521	D	B	72	B
225/40ZR19	93 XL	Y	300 186	340 49	650 1433	B	B	72	B
225/40ZRF19 RFT	93 XL	Y	300 186	340 44	650 1433	D	B	72	B
235/40ZR19	96 XL	Y	300 186	340 49	710 1565	B	B	72	B
245/40ZR19	98 XL	Y	300 186	340 49	750 1653	B	B	72	B
245/40ZRF19 RFT	98 XL	Y	300 186	340 49	750 1653	D	B	72	B
255/40ZR19	100 XL	Y	300 186	340 49	800 1764	B	B	73	B
255/40ZRF19 RFT	100 XL	Y	300 186	340 49	800 1764	D	B	73	B
275/40ZR19	101	Y	300 186	300 44	825 1819	B	B	72	B
275/40ZRF19 RFT	101	Y	300 186	300 44	825 1819	D	B	72	B
245/40ZR20	99 XL	Y	300 186	340 49	775 1709	B	B	72	B
245/40ZRF20 RFT	99 XL	Y	300 186	340 49	775 1709	D	B	72	B
255/40ZR21	102 XL	Y	300 186	340 49	850 1874	B	B	73	B
265/40ZR21	105 XL	Y	300 186	340 49	925 2039	B	B	73	B
215/35ZR18	84 XL	W	270 168	340 49	500 1102	B	B	72	B
255/35ZR18	94 XL	Y	300 186	340 49	670 1477	B	B	73	B
255/35ZRF18 RFT	90	Y	300 186	300 44	600 1323	D	B	72	B
265/35ZR18	97 XL	W	270 168	340 49	730 1609	B	B	73	B
215/35ZR19	85 XL	W	270 168	340 49	515 1125	B	B	72	B
225/35ZR19	88 XL	Y	300 186	340 49	560 1235	B	B	72	B
235/35ZR19	93 XL	Y	300 186	340 49	650 1433	B	B	72	B
245/35ZR19	96 XL	Y	300 186	340 49	730 1609	B	B	72	B
255/35ZR19	97 XL	Y	300 186	340 49	710 1565	B	B	73	B
255/35ZRF19 RFT	96 XL	Y	300 186	340 49	710 1565	D	B	73	B
275/35ZR19	100 XL	Y	300 186	340 49	800 1764	B	B	73	B
275/35ZRF19 RFT	100 XL	Y	300 186	340 49	800 1764	D	B	73	B
245/35ZR20	93 XL	W	270 168	340 49	650 1433	B	B	72	B
245/35ZRF20 RFT	93 XL	W	270 168	340 49	650 1433	D	B	72	B
245/35ZR20	95 XL	Y	300 186	340 49	690 1521	B	B	72	B
255/35ZR20	97 XL	W	270 168	340 49	730 1609	B	B	73	B
275/35ZR20	102 XL	Y	300 186	340 49	850 1874	B	B	73	B
275/35ZRF20 RFT	102 XL	Y	300 186	340 49	850 1874	D	B	73	B
255/30ZR19	91 XL	Y	300 186	340 49	615 1356	C	B	73	B
265/30ZR19	93 XL	W	270 168	340 49	650 1433	B	B	73	B
275/30ZR19	96 XL	Y	300 186	340 49	710 1565	B	B	73	B
245/30ZR20	97 XL	W	270 168	340 49	730 1609	C	B	72	B
275/30ZR20	102 XL	Y	300 186	340 49	850 1874	B	B	73	B
285/30ZR20	99 XL	W	270 168	340 49	775 1709	B	B	75	B
275/30ZR21	98 XL	Y	300 186	340 49	750 1653	B	B	73	B



- Special profile design has been adopted to increase tyre rigidity and driving comfort, high-speed stability and safety.
- Pitch pattern designed by CAD reduces the noise generation.
- Innovative tread compound provides better all-season grip, lower rolling resistance and improved mileage.

Size	Loading Index	Speed	Max. Speed Km/h	MPH	Max. Pressure S(kpa)	S(psi)	Max. Load S(kg)	S(lb)			
155/80R13	79	T	190	118	300	44	437	963	D	B	70 B
155/70R13	79 XL	T	190	118	340	49	437	963	C	B	71 B
165/70R13	79	T	190	118	300	36	437	963	C	B	70 B
175/70R13	82	H	210	130	300	44	475	1047	C	B	70 B
165/70R14	81	T	190	118	300	44	462	1019	C	B	70 B
175/70R14	88 XL	T	190	118	340	49	560	1235	C	B	71 B
185/70R14	88	H	210	130	300	44	560	1235	C	B	70 B
195/70R14	91	H	210	130	300	44	610	1345	C	B	70 B
165/65R13	77	H	210	130	300	44	412	908	C	B	70 B
155/65R14	75	T	190	118	300	44	387	853	C	B	70 B
165/65R14	79	H	210	130	300	44	437	963	C	B	70 B
175/65R14	86 XL	H	210	130	340	49	530	1168	C	B	71 B
175/65R14	82	H	210	130	300	44	475	1047	C	B	70 B
185/65R14	86	H	210	130	300	44	530	1168	C	B	70 B
175/65R15	88 XL	H	210	130	340	49	560	1235	C	B	71 B
185/65R15	88	H	210	130	300	44	560	1235	C	B	70 B
165/60R14	75	H	210	130	300	44	387	853	D	B	70 B
185/60R14	82	H	210	130	300	44	475	1047	C	B	70 B
175/60R15	81	H	210	130	300	44	462	1019	C	B	70 B
185/60R15	88 XL	H	210	130	340	49	560	1235	C	B	71 B
195/60R15	88	V	240	149	300	44	560	1235	C	B	71 B
165/55R14	72	H	210	130	300	44	355	783	D	B	70 B



- Compact shoulder design to improving stability on shoulder area.
- Special optimized sipes design on mid of tread , provide extra grip capability and braking performance.
- Special tread compound reduces fuel consumption and increases higher mileage.
- Non-directional twists and turn groove new design provides outstanding grip when driving on all season application, even in stony, muddy and off-road condition surfaces.
- Continuous channels ensure faster and more effective water explosion from the contact patch.
- Special tread compound reduces fuel consumption and increases higher mileage .

ZTR08

Size	Loading Index	Speed	Max. Speed Km/h	MPH	Max. Pressure S(kpa)	S(psi)	Max. Load S(kg)	S(lb)				M+S
185R14C-8PR	102/100	R	170	106	450	65	850	1874	C	B	72 B	
195R14C-8PR	106/104	R	170	106	450	65	950	2094	C	B	72 B	
195R15C-8PR	106/104	S	180	112	450	65	950	2094	C	B	72 B	

ZTR18

Size	Loading Index	Speed	Max. Speed Km/h	MPH	Max. Pressure S(kpa)	S(psi)	Max. Load S(kg)	S(lb)				M+S
185/75R16C-8PR	104/102	S	180	112	475	69	900	1984	C	B	72 B	
195/75R16C-8PR	107/105	R	170	106	475	69	975	2149	C	B	72 B	
205/75R16C-8PR	110/108	R	170	106	475	69	1060	2337	C	B	72 B	
215/75R16C-8PR	113/111	S	180	112	475	69	1150	2535	C	B	72 B	
175/70R14C-6PR	95/93	S	180	112	375	55	690	1520	C	B	72 B	
195/70R15C-8PR	104/102	S	180	112	450	65	900	1984	C	B	72 B	
215/70R15C-8PR	109/107	S	180	112	475	69	1030	2271	C	B	72 B	
225/70R15C-8PR	112/110	S	180	112	475	69	1120	2469	C	B	72 B	
215/65R15C-6PR	104/102	T	190	118	375	55	900	1984	C	B	72 B	
195/65R16C-8PR	104/102	T	190	118	475	69	900	1984	C	B	72 B	
205/65R16C-8PR	107/105	T	190	118	475	69	975	2149	C	B	72 B	
215/65R16C-8PR	109/107	T	190	118	475	69	1030	2271	C	B	72 B	
225/65R16C-8PR	112/110	T	190	118	475	69	1120	2469	C	B	72 B	
235/65R16C-8PR	115/113	T	190	118	475	69	1215	2679	C	B	72 B	



IMPERO



- Modern design and premium high performance tyre provides sport trucks , SUVs, and crossovers with superb handling.
- Confident all-season performance , consistent wear and smooth , quite ride.

M+S

Size	Loading Index	Speed	Max. Speed Km/h	MPH	Max. Pressure S(kpa)	S(psi)	Max. Load S (kg)	S (lb)			
215/65R16	102 XL	H	210	130	340	49	850	1874	B	B	72 B
215/65R17	99	V	240	149	300	44	775	1709	B	B	71 B
225/65R17	102	H	210	130	300	44	850	1874	C	B	71 B
235/65R17	108 XL	V	240	149	340	49	1000	2205	B	B	72 B
255/65R17	110	H	210	130	300	44	1060	2337	B	B	72 B
265/65R17	112	H	210	130	300	44	1120	2469	B	B	72 B
235/65R18	110 XL	H	210	130	340	49	1060	2337	B	B	72 B
235/60R16	100	V	240	149	300	44	800	1764	B	B	71 B
215/60R17	96	H	210	130	300	44	710	1565	C	B	71 B
225/60R17	99	V	240	149	300	44	775	1709	C	B	71 B
235/60R17	102	H	210	130	300	44	850	1874	B	B	71 B
225/60R18	104 XL	V	240	149	340	49	900	1984	B	B	72 B
235/60R18	107 XL	V	240	149	340	49	975	2149	B	B	72 B
255/60R18	112 XL	H	210	130	340	49	1120	2469	B	B	73 B
265/60R18	110	V	240	149	300	44	1060	2337	B	B	72 B
275/60R20	115	V	240	149	300	44	1215	2679	B	B	72 B
235/55ZR17	103 XL	W	270	168	340	49	875	1929	B	B	72 B
215/55R18	99 XL	V	240	149	340	49	775	1709	B	B	72 B
235/55R18	100	V	240	149	300	44	800	1764	B	B	71 B
235/55ZRF18 RFT	100	W	270	168	300	44	800	1764	D	B	71 B
255/55ZR18	109 XL	W	270	168	340	49	1030	2271	B	B	73 B
255/55RF18 RFT	109 XL	V	240	149	340	49	1030	2271	D	B	73 B
225/55R19	99	V	240	149	300	44	774	1706	C	B	71 B
235/55ZR19	105 XL	W	270	168	340	49	925	2039	B	B	72 B
235/55RF19 RFT	101	V	240	149	300	44	825	1819	D	B	71 B
245/55ZR19	103	W	270	168	300	44	875	1929	B	B	71 B

M+S

Size	Loading Index	Speed	Max. Speed Km/h	MPH	Max. Pressure S(kpa)	S(psi)	Max. Load S (kg)	S (lb)			
255/55R19	111 XL	V	240	149	340	49	1090	2403	B	B	73 B
235/55ZR20	102	W	270	168	300	44	850	1874	B	B	71 B
255/55R20	110 XL	V	240	149	340	49	1060	2337	B	B	73 B
215/50R18	96 XL	V	240	149	340	49	710	1565	B	B	72 B
225/50ZR18	99 XL	W	270	168	340	49	775	1709	B	B	72 B
225/50ZRF18 RFT	95	W	270	168	300	44	690	1521	D	B	71 B
235/50ZR18	101 XL	W	270	168	340	49	825	1819	B	B	72 B
235/50ZRF18 RFT	101 XL	W	270	168	340	49	825	1819	D	B	72 B
245/50ZR18	104 XL	W	270	168	340	49	900	1984	B	B	72 B
245/50ZRF18 RFT	100	Y	300	186	300	44	800	1764	D	B	71 B
235/50ZR19	103 XL	W	270	168	340	49	875	1929	B	B	72 B
245/50ZR19	105 XL	W	270	168	340	49	925	2039	B	B	72 B
245/50ZFR19 RFT	105 XL	W	270	168	340	49	925	2039	D	B	72 B
255/50ZR19	103	W	270	168	300	44	875	1929	B	B	72 B
255/50ZRF19 RFT	103	W	270	168	300	44	875	1929	D	B	72 B
265/50ZR19	110 XL	Y	300	186	340	49	1060	2337	B	B	73 B
235/50ZR20	104 XL	W	270	168	340	49	900	1984	B	B	72 B
245/50ZR20	102	W	270	168	300	44	850	1874	B	B	71 B
275/50R20	113 XL	V	240	149	340	49	1150	2535	B	B	73 B
255/45ZR19	100	W	270	168	300	44	800	1764	B	B	72 B
285/45ZR19	107	W	270	168	300	44	975	2149	B	B	74 B
245/45ZR20	103 XL	W	270	168	340	49	875	1929	B	B	72 B
275/45ZR20	110 XL	W	270	168	340	49	1060	2337	B	B	73 B
265/45ZR21	104	Y	300	186	300	44	900	1984	B	B	72 B
275/45ZR21	110 XL	Y	300	186	340	49	1060	2337	B	B	73 B
245/40ZR20	99 XL	W	270	168	340	49	775	1709	B	B	72 B
275/40ZR20	106 XL	W	270	168	340	49	950	2094	B	B	73 B
275/40ZRF20 RFT	106 XL	W	270	168	340	49	950	2094	D	B	73 B
285/40ZR21	109 XL	Y	300	186	340	49	1030	2271	B	B	75 B
315/40ZR21	111	Y	300	186	300	44	1090	2403	B	B	74 B
275/40R22	108 XL	V	240	149	340	49	1000	2205	B	B	73 B
315/35ZR20	110 XL	W	270	168	340	49	1060	2337	B	B	75 B
315/35ZRF20 RFT	110 XL	W	270	168	340	49	1060	2337	D	B	75 B
295/35ZR21	107 XL	Y	300	186	340	49	975	2149	B	B	75 B
265/35ZR22	102 XL	W	270	168	340	49	850	1874	B	B	73 B
285/35ZR22	106 XL	W	270	168	340	49	950	2094	B	B	75 B



ZIVARO A/T



- Warparound tread gives tyres a rugged look and guards against cuts , bruises' and impact breaks , affords outstanding traction especially in muddy or snowy conditions.
- Reinforced wide tread gauge helps to prevent internal damage from impacts sustains when off the road.
- Thick sidewall rubber gauge helps to minimize damage from off-road impact.
- Reinforced carcass and rubber gauge improved hill climbing and steering stability both on and off the road.

M+S

Size	Loading Index	Speed	Max. Speed Km/h	Max. Speed MPH	Max. Pressure S(kpa)	Max. Pressure S(psi)	Max. Load S (kg)	Max. Load S (lb)				
215/70R16	100	H	210	130	300	44	800	1764	TBA	TBA	TBA	TBA
225/70R16	103	T	190	118	300	44	875	1929	TBA	TBA	TBA	TBA
225/65R17	102	H	210	130	300	44	850	1874	TBA	TBA	TBA	TBA
265/65R17	112	T	190	118	300	44	1120	2469	TBA	TBA	TBA	TBA
265/60R18	114 XL	T	190	118	340	49	1180	2601	TBA	TBA	TBA	TBA
265/50R20	111 XL	V	240	149	340	49	1090	2403	TBA	TBA	TBA	TBA
LT215/85R16-10PR	115/112	S	180	112	550	80	1215	2680	TBA	TBA	TBA	TBA
LT235/85R16-10PR	120/116	Q	160	99	550	80	1380	3042	TBA	TBA	TBA	TBA
LT235/80R17-10PR	120/117	S	180	112	550	80	1400	3085	TBA	TBA	TBA	TBA
LT215/75R15-6PR	100/97	S	190	118	550	80	800	1764	TBA	TBA	TBA	TBA
LT235/75R15-8PR	110/107	S	180	112	450	65	1060	2335	TBA	TBA	TBA	TBA
LT225/75R16-10PR	115/112	S	180	112	550	80	1215	2680	TBA	TBA	TBA	TBA
LT245/75R16-10PR	120/116	S	180	112	550	80	1380	3042	TBA	TBA	TBA	TBA
LT265/75R16-10PR	123/120	S	180	112	550	80	1550	3415	TBA	TBA	TBA	TBA
LT285/75R16-10PR	126/123	S	180	112	550	80	1700	3750	TBA	TBA	TBA	TBA
LT245/75R17-10PR	121/118	S	180	112	550	80	1450	3195	TBA	TBA	TBA	TBA
LT235/70R16-6PR	104/101	S	180	112	350	50	900	1985	TBA	TBA	TBA	TBA
LT245/70R16-10PR	118/115	S	180	112	550	80	1320	2910	TBA	TBA	TBA	TBA
LT265/70R16-10PR	121/118	S	180	112	550	80	1450	3195	TBA	TBA	TBA	TBA
LT245/70R17-10PR	119/116	S	180	112	550	80	1360	3000	TBA	TBA	TBA	TBA
LT265/70R17-10PR	121/118	S	180	112	550	80	1450	3195	TBA	TBA	TBA	TBA
LT285/70R17-10PR	121/118	Q	160	99	550	80	1450	3195	TBA	TBA	TBA	TBA
LT265/70R18-10PR	124/121	S	180	112	550	80	1600	3525	TBA	TBA	TBA	TBA
LT275/70R18-10PR	125/122	S	180	112	550	80	1650	3640	TBA	TBA	TBA	TBA
LT275/65R18-10PR	123/120	S	180	112	550	80	1550	3415	TBA	TBA	TBA	TBA
LT275/65R20-10PR	126/123	S	180	112	550	80	1700	3750	TBA	TBA	TBA	TBA
LT265/60R20-10PR	121/118	S	180	112	550	80	1450	3195	TBA	TBA	TBA	TBA
LT285/60R20-10PR	125/122	S	180	112	550	80	1650	3640	TBA	TBA	TBA	TBA
31*10.5R15LT-6PR	109	S	180	112	350	50	1030	2270	TBA	TBA	TBA	TBA



TOLEDO FORTRAK M/T



- The tread pattern void ratio is balanced for excellent off-road traction and on road handling.
- High-density siping helps resist hydroplaning by cutting through the thin film of water on the road surface, this provides outstanding all-season traction.
- Specially designed tread block provide better grip in mud , sand and snow.
- Unique stone-Ejector grooves along with a rugged shoulder help to prevent damage from impact.
- Optimized void-to-rubber ratio provides excellent traction.
- Large surface area tread blocks provide increased grip.

TOLEDO

M+S

Size	Loading Index	Speed	Max. Speed Km/h	Max. Speed MPH	Max. Pressure S(kpa)	Max. Pressure S(psi)	Max. Load S (kg)	Max. Load S (lb)				
LT235/75R15	110/107	S	180	112	450	65	1060	2337	TBA	TBA	TBA	TBA
LT265/75R16	123/120 XL	Q	160	100	550	80	1550	3417	TBA	TBA	TBA	TBA
245/75R16	109	S	180	112	300	44	1030	2271	TBA	TBA	TBA	TBA
235/70R16	109 XL	T	190	118	340	49	1030	2271	TBA	TBA	TBA	TBA
245/70R16	111 XL	T	190	118	340	49	1090	2403	TBA	TBA	TBA	TBA
265/70R16	112	H	210	130	300	44	1120	2469	TBA	TBA	TBA	TBA
275/65R17	115	H	210	130	300	44	1215	2679	TBA	TBA	TBA	TBA

FORTRAK M/T

M+S

Size	Loading Index	Speed	Max. Speed Km/h	Max. Speed MPH	Max. Pressure S(kpa)	Max. Pressure S(psi)	Max. Load S (kg)	Max. Load S (lb)				
33x12.50R18LT-10PR	118	Q	160	99	450	65	1320	2910	TBA	TBA	TBA	TBA
33x12.50R20LT-10PR	114	Q	160	99	450	65	1180	2600	TBA	TBA	TBA	TBA
35X12.50R17LT-10PR	121	Q	160	99	450	65	1450	3195	TBA	TBA	TBA	TBA
35X12.50R18LT-10PR	123	Q	160	99	450	65	1550	3415	TBA	TBA	TBA	TBA
35X12.50R20LT-10PR	121	Q	160	99	450	65	1450	3195	TBA	TBA	TBA	TBA
LT285/65R18-10PR	125/122	Q	160	99	550	80	1650	3640	TBA	TBA	TBA	TBA



ZTR10 ZTR20



- Directional design with four optimized wide longitudinal grooves ensure water expulsion and precise steering on wet grip.
- High stiffness center rib can ensure straight-line performance and extremely improve response and stability when cornering or change the lane.
- Solid center rib designed for high-speed stability.
- Four deep grooves ensure fast water disposal and improve the handling on wet, snow and dry conditions.
- Separated by anarrow groove on shoulder areas ensure low rolling resistance and improved handling when turning.

ZTR10

Size	Loading Index	Speed	Max. Speed Km/h MPH	Max. Pressure S(kpa) S(psi)	Max. Load S(kg) S(lb)			
195/50R16	84	V	240 149	300 44	500 1102	C	B	71 B
205/50ZR16	87	W	270 168	300 44	545 1201	C	B	71 B
225/50ZR16	92	W	270 168	300 44	630 1389	B	B	71 B
205/45ZR16	87 XL	W	270 168	340 49	545 1201	C	B	72 B
245/45ZR17	99 XL	W	270 168	340 49	775 1709	B	B	72 B
205/40ZR17	84 XL	W	270 168	340 49	500 1102	C	B	72 B
245/40ZR17	95 XL	W	270 168	340 49	690 1521	B	B	72 B

ZTR20

Size	Loading Index	Speed	Max. Speed Km/h MPH	Max. Pressure S(kpa) S(psi)	Max. Load S(kg) S(lb)			
185/70R13	86	T	190 118	300 44	530 1168	C	B	70 B
205/70R15	96	H	210 130	300 44	710 1565	B	B	71 B
215/65R16	98	H	210 130	300 44	750 1653	B	B	71 B
195/60R14	86	H	210 130	300 44	530 1168	C	B	71 B
205/60R15	91	V	240 149	300 44	615 1356	B	B	71 B
175/55R15	77	H	210 130	300 44	412 908	C	B	70 B
185/55R15	82	V	240 149	300 44	475 1047	C	B	70 B
185/55R16	83	V	240 149	300 44	487 1074	C	B	70 B

**ALL-WEATHER
TYRES**

OUTSTANDING EVERYWHERE



M+S



ACTIVE 4S

ACTIVEPOWER 4S

ACTIVE 4S ACTIVEPOWER 4S



A high performance all season tyre with an asymmetric tread design, which has been optimized to provide superior comfort in dry or wet weather and light snow road condition.

- Multiple sipes across the tread enhance traction in all weather.
- Variable-pitching shoulders design allow for high stability and lower noise.
- A special silica-compound leads to increased tread mileage.

A non-directional All-season tyre for Van and light truck, total balance designing to combine with functions and performances.

- Optimized sipes improve excellent wet grip and traction on both hydroplaning and snow road surface.
- Large shoulder block provide strength and stiffness for outstanding handling and braking while driving.
- Premium Silica compound yields excellent wear and lower Rolling-resistance in service.

ACTIVE 4S

M+S

Size	Loading Index	Speed	Type	Tread Depth		Max. Speed Km/h	Icons		
				1/32"	mm		U	W	S
165/70R14	81	T	PCR	10.7	8.5	190	D	B	71 B
175/70R14	88 XL	T	PCR	10.7	8.5	190	D	B	71 B
155/65R14	75	T	PCR	10.7	8.5	190	D	B	71 B
175/65R14	82	T	PCR	10.7	8.5	190	D	B	71 B
185/65R15	88	H	PCR	10.7	8.5	210	D	B	71 B
195/65R15	91	H	PCR	10.7	8.5	210	D	B	72 B
215/65R16	102 XL	H	PCR	10.7	8.5	210	C	B	72 B
185/60R15	88 XL	H	PCR	10.7	8.5	210	D	B	71 B
195/60R15	88	H	PCR	10.7	8.5	210	D	B	72 B
205/60R16	96 XL	H	PCR	10.7	8.5	210	C	B	72 B
235/60R18	107 XL	V	PCR	10.7	8.5	240	C	B	72 B
185/55R15	82	H	PCR	10.7	8.5	210	D	B	71 B
195/55R15	85	H	PCR	10.7	8.5	210	D	B	72 B
195/55R16	87	H	PCR	10.7	8.5	210	D	B	72 B
205/55R16	91	V	PCR	10.7	8.5	240	C	B	72 B
215/55R16	97 XL	V	PCR	10.7	8.5	240	C	B	72 B
215/55ZR17	98 XL	W	PCR	10.7	8.5	270	C	B	72 B
225/55ZR17	101 XL	W	PCR	10.7	8.5	270	C	B	72 B
195/50R15	82	V	PCR	10.7	8.5	240	D	B	72 B
205/50ZR17	93 XL	W	PCR	10.7	8.5	270	D	B	72 B
225/50R17	98 XL	V	PCR	10.7	8.5	240	C	B	72 B
225/45R17	94 XL	V	PCR	10.7	8.5	240	C	B	72 B

ACTIVEPOWER 4S

M+S

Size	Ply	Loading Index	Speed	Type	Tread Depth		Max. Speed Km/h	Icons		
					1/32"	mm		U	W	S
195/70R15C	8PR/LRD	104/102	R	VAN	12.0	9.5	170	C	B	73 B
195/65R16c	8PR/LRD	104/102	R	VAN	12.0	9.5	170	C	B	73 B
205/65R16c	8PR/LRD	107/105	T	VAN	12.0	9.5	190	C	B	73 B
215/65R16c	8PR/LRD	109/107	T	VAN	12.0	9.5	190	C	B	73 B
225/65R16c	8PR/LRD	112/110	S	VAN	12.1	9.6	180	C	B	73 B
235/65R16c	8PR/LRD	115/113	R	VAN	12.2	9.7	170	C	B	73 B

WINTER TYRES

SNOW WITH PASSION

3D-SIPES DESIGN WITH SILICA COMPOUND
MULTI-FLAT PROFILE AND WIDE TREAD DESIGN.
CERTIFIED MOUNTAIN-SNOWFLAKE



NEARLY INTRODUCED STUDABLE WINTER TYRES
IMPROVE DRIVING EXPERIENCE ON SNOW
AS WELL AS ICE.

ZETA



ANTARCTICA 5



Studless winter tyres for PCR

- Designed for excellent comfort, long life and safe trips with short braking distance.
- Specially developed compound and pattern designed for wet and cold road conditions.
- Pattern designed by special simulation programs, and balance water flow and road handling.

M+S

Size	Loading Index	Speed	Type	Tread Depth 1/32" mm	Max. Speed Km/h				
155/80R13	79	T	PCR	10.6	8.4	190	D	B	71 B
155/70R13	75	T	PCR	10.6	8.4	190	D	B	71 B
165/70R14	81	T	PCR	10.3	8.2	190	D	B	71 B
175/70R14	88 XL	T	PCR	11.0	8.7	190	D	B	71 B
155/65R13	73	T	PCR	10.6	8.4	190	D	B	71 B
155/65R14	75	T	PCR	10.3	8.2	190	D	B	71 B
175/65R14	82	T	PCR	10.7	8.5	190	D	B	71 B
185/65R14	86	T	PCR	10.7	8.5	190	D	B	71 B
175/65R15	84	T	PCR	11.0	8.7	190	D	B	71 B
185/65R15	88	T	PCR	10.7	8.5	190	D	B	71 B
195/65R15	91	H	PCR	10.7	8.5	210	D	B	72 B
205/65R15	94	H	PCR	10.7	8.5	210	C	B	72 B
215/65R16	98	H	PCR	10.7	8.5	210	C	B	72 B
185/60R14	82	T	PCR	10.7	8.5	190	D	B	71 B
185/60R15	88 XL	H	PCR	10.7	8.5	210	D	B	71 B
195/60R15	88	H	PCR	10.7	8.5	210	D	B	72 B
205/60R16	96 XL	H	PCR	10.7	8.5	210	C	B	72 B
215/60R16	99 XL	H	PCR	10.7	8.5	210	C	B	72 B
185/55R15	82	H	PCR	11.0	8.7	210	D	B	71 B
195/55R15	85	H	PCR	10.7	8.5	210	D	B	72 B
195/55R16	87	H	PCR	10.7	8.5	210	D	B	72 B
205/55R16	91	H	PCR	10.7	8.5	210	C	B	72 B
215/55R16	97 XL	V	PCR	10.7	8.5	240	C	B	72 B
225/55R16	99 XL	V	PCR	10.7	8.5	240	C	B	72 B
205/55R17	95 XL	H	PCR	11.0	8.7	210	D	B	72 B
215/55R17	98 XL	H	PCR	10.7	8.5	210	C	B	72 B
225/55R17	97	H	PCR	10.7	8.5	210	C	B	72 B
205/50R17	93 XL	H	PCR	10.7	8.5	240	D	B	72 B
215/50R17	95 XL	H	PCR	11.0	8.7	210	C	B	72 B
225/50R17	98 XL	H	PCR	11.0	8.7	210	C	B	72 B
195/45R16	84 XL	H	PCR	11.0	8.7	210	D	B	72 B
225/45R17	94 XL	V	PCR	10.7	8.5	240	C	B	72 B
245/45R18	100 XL	V	PCR	10.7	8.5	240	C	B	72 B
225/40R18	92 XL	V	PCR	10.7	8.5	240	C	B	72 B



ANTARCTICA 6 ANTARCTICA B



Studless winter tyres for AT/SUV

- Higher anti-aquaplaning performance design to improve driving stability and safety on wet surface.
- Enough rigidity on shoulder areas to ensure outstanding cross-country performance even on snow or ice.

Studless winter tyres for VAN

- Three wide longitudinal grooves provide quick water dispersal and improve handling, braking and hydroplaning resistance.
- The high number of blocks, and high density of 3D-sipes, ensures more safety and mobility.
- Drainage grooves on both sides of the shoulder area, work in tandem to effectively drain snow, slush and water, maximizing the tyre's contact with road surface.

ANTARCTICA 6

M+S

Size	Loading Index	Speed	Type	Tread Depth 1/32" mm	Max. Speed Km/h				
215/70R16	100	H	AT/SUV	12.0	9.5	210	C	B	72 B
245/70R17	110	T	AT/SUV	12.0	9.5	190	C	B	72 B
235/65R17	108 XL	V	AT/SUV	12.0	9.5	210	C	B	72 B
245/65R17	107	H	AT/SUV	12.0	9.5	210	C	B	72 B
215/60R17	96	H	AT/SUV	12.0	9.5	210	D	B	72 B
225/60R18	100	H	AT/SUV	11.0	8.7	210	C	B	72 B
235/60R18	107 XL	T	AT/SUV	11.0	8.7	190	C	B	72 B
235/55R17	103 XL	V	AT/SUV	12.0	9.5	240	C	B	72 B
215/55R18	95	H	AT/SUV	11.0	8.7	210	D	B	72 B
225/55R18	98	T	AT/SUV	11.0	8.7	190	C	B	72 B
235/55R18	104 XL	H	AT/SUV	11.0	8.7	210	C	B	72 B
255/55R18	109 XL	V	AT/SUV	12.0	9.5	240	C	B	73 B
235/55R19	101	H	AT/SUV	11.0	8.7	210	C	B	72 B

ANTARCTICA B

M+S

Size	Loading Index	Speed	Type	Tread Depth 1/32" mm	Max. Speed Km/h				
195/70R15C-8PR	104/102	S	Van	12.5	9.9	180	C	B	73 B
205/70R15C-8PR	106/104	S	Van	12.5	9.9	180	C	B	73 B
225/70R15C-8PR	112/110	S	Van	13.0	10.3	180	C	B	73 B
195/65R16C-8PR	104/102	T	Van	12.5	9.9	190	C	B	73 B
205/65R16C-8PR	107/105	T	Van	12.5	9.9	190	C	B	73 B
215/65R16C-8PR	109/107	T	Van	12.5	9.9	190	C	B	73 B
235/65R16C-8PR	115/113	S	Van	13.0	10.3	180	C	B	73 B

ANTARCTICA ICE

ANTARCTICA SPORT



+ STUDABLE WINTER TYRES +

+ STUDABLE WINTER TYRES +

Stunable winter tyres for PCR

- Two circumferential tracks and the central step-shaped groove ensure outstanding course stability and precise handling at cornering.
- Balanced tread profile provide excellent driving characteristics and shorter braking in the most city harsh road conditions.
- Special Smart winter rubber compound with ideally balanced softness, grip, wear resistance and strength characteristics.

Stunable winter tyres for AT/SUV/LT/Van

- V-sharp directional studdable tread design integrated more comfort and safety drive on Ice/Snow surface.
- Advanced high elasticity tread rubber compound formulation fitted for a very low temperature.
- Enhances pulling capacity and traction performance on heavy icy road optimized stud pin position combined with multi-sipe groove arrangement.

M+S

Size	LI/SI	Type	Tread Depth 1/32" mm	Max.Speed (Km/h)				Suggested Stud*	No.of stud
205/70R15	100 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	102
225/70R16	107 T XL	PCR	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	110
235/70R16	106 T XL	PCR	13.3 10.5	190	D	C	72 B	A8-11/2.2A2	112
245/70R16	111 T XL	PCR	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	114
265/70R16	112 T XL	PCR	13.3 10.5	190	C	C	73 B	A8-11/2.2A2	114
175/65R14	82 T	PCR	12.0 9.5	190	D	C	71 B	A8-11/2.2A2	89
185/65R14	86 T	PCR	12.0 9.5	190	D	C	71 B	A8-11/2.2A2	91
185/65R15	88 T	PCR	12.0 9.5	190	D	C	71 B	A8-11/2.2A2	95
195/65R15	95 T XL	PCR	12.0 9.5	190	D	C	72 B	A8-11/2.2A2	97
205/65R15	99 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	98
205/65R16	99 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	98
215/65R16	102 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	105
185/60R15	88 T XL	PCR	12.0 9.5	190	D	C	71 B	A8-11/2.2A2	90
195/60R15	88 T	PCR	12.0 9.5	190	D	C	72 B	A8-11/2.2A2	92
205/60R16	92 T	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	99
215/60R16	99 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	101
225/60R16	102 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	103
195/55R16	91 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	91
205/55R16	91 T	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	96
215/55R16	97 T XL	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	97
215/55R17	94 T	PCR	12.0 9.5	190	D	C	72 B	A8-11/2.2A2	100
225/55R17	97 T	PCR	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	100
225/50R17	98 H XL	PCR	12.0 9.5	210	C	C	72 B	A8-11/2.2A2	100
225/45R17	94 H XL	PCR	12.0 9.5	210	C	C	72 B	A8-11/2.2A2	97
245/45R18	100 H XL	PCR	12.0 9.5	210	C	C	72 B	A8-11/2.2A2	98
225/40R18	92 H XL	PCR	12.0 9.5	210	C	C	72 B	A8-11/2.2A2	97

M+S

Size	LI/SI	Type	Tread Depth 1/32" mm	Max.Speed (Km/h)				Suggested Stud*	No.of stud
215/70R16	100 T	SUV	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	109
265/70R17	115 S	SUV	13.3 10.5	180	C	C	73 B	A8-11/2.2A2	115
215/65R17	103 T XL	SUV	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	107
225/65R17	102 T	SUV	13.3 10.5	190	D	C	72 B	A8-11/2.2A2	111
235/65R17	108 T XL	SUV	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	113
265/65R17	116 T XL	SUV	13.3 10.5	190	C	C	73 B	A8-11/2.2A2	113
215/60R17	96 T	SUV	13.3 10.5	190	D	C	72 B	A8-11/2.2A2	105
225/60R17	103 T XL	SUV	13.3 10.5	190	C	C	72 B	A8-11/2.2A2	107
265/60R18	114 T XL	SUV	12.0 9.5	190	C	C	73 B	A8-11/2.2A2	113
275/60R20	115 S	SUV	13.3 10.5	180	C	C	73 B	A8-11/2.2A2	120
255/55R18	109 T XL	SUV	12.0 9.5	190	C	C	73 B	A8-11/2.2A2	106
225/55R19	103 T XL	SUV	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	111
275/55R20	117 H XL	SUV	13.3 10.5	210	C	C	73 B	A8-11/2.2A2	120
285/50R20	116 T XL	SUV	13.3 10.5	190	C	C	75 B	A8-11/2.2A2	117
275/50R21	113 T XL	SUV	13.3 10.5	190	C	C	73 B	A8-11/2.2A2	120
235/45R18	98 T XL	SUV	12.0 9.5	190	C	C	72 B	A8-11/2.2A2	102
245/45R20	103 H XL	SUV	13.3 10.5	210	C	C	72 B	A8-11/2.2A2	111
275/40R20	106 T XL	SUV	13.3 10.5	190	C	C	73 B	A8-11/2.2A2	108
315/35R20	110 T XL	SUV	13.3 10.5	190	C	C	75 B	A8-11/2.2A2	108
LT225/75R16-10PR	115/112 Q	LT	13.3 10.5	160	C	C	73 B	A8-11/2.2A2	107
LT245/75R16-10PR	120/116 Q	LT	13.3 10.5	160	C	C	73 B	A8-11/2.2A2	113
LT265/70R17-10PR	121/118 Q	LT	13.3 10.5	160	C	C	73 B	A8-11/2.2A2	115
235/65R16C-8PR	115/113 R	Van	13.6 10.7	170	C	C	73 B	A8-11/2.2A2	109
235/65R16C-10PR	121/119 R	Van	13.6 10.7	170	C	C	73 B	A8-11/2.2A2	109

Run-Flat



A TRUE NEW GENERATION OF Run-flat Tyres

THE FOURTH-GENERATION CARCASS SUPPORT MATERIAL MAKES DRIVING MORE STABLE AND SAFER.

THE UP-TO-DATE TREAD RUBBER FORMULA MAKES DRIVING MORE QUIET AND COMFORTABLE THAN ORDINARY TYRES.

WHILE IMPROVING THE HANDLING, IT SEEKS FOR MORE OVERALL PERFORMANCE AND DURABILITY AS A RUN-FLAT TYRE.




ALVENTI

IMPERO M+S



Surpassing international test standards, each pace run-flat tyre ensures a continuous safe driving of over 120 kilometers at a speed of 80 kilometers per hour under zero pressure.

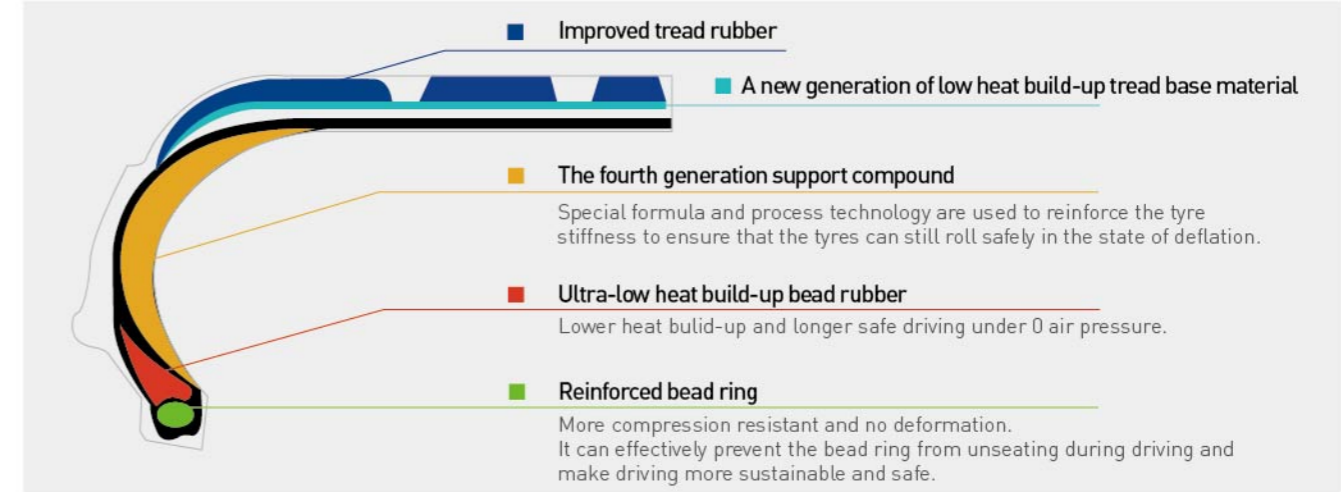

ZETA Run-flat Tyre Specifications:

Size	Pattern Code	Loading Index	Speed	Max. Speed Km/h	Max. Speed MPH	Max. Pressure S(kpa)	Max. Pressure S(psi)	Max. Load S(kg)	Max. Load S(lb)	U	W	W
205/60ZRF16 RFT	Alventi	92	W	270	168	300	44	630	1389	D	B	71 B
195/55RF16 RFT	Alventi	87	V	240	149	300	44	545	1201	D	B	71 B
205/55ZRF16 RFT	Alventi	91	W	270	168	300	44	615	1356	D	B	71 B
225/55ZRF16 RFT	Alventi	95	W	270	168	300	44	690	1521	D	B	71 B
205/55RF17 RFT	Alventi	91	V	240	149	300	44	615	1356	D	B	71 B
225/55ZRF17 RFT	Alventi	97	Y	300	186	300	44	730	1609	D	B	71 B
205/50ZRF17 RFT	Alventi	89	W	270	168	300	44	580	1279	D	B	71 B
225/50ZRF17 RFT	Alventi	94	W	270	168	300	44	750	1653	D	B	71 B
205/45ZRF17 RFT	Alventi	88 XL	W	270	168	340	49	560	1235	D	B	72 B
225/45ZRF17 RFT	Alventi	94 XL	W	270	168	340	49	670	1477	D	B	72 B
225/45ZRF18 RFT	Alventi	91	Y	300	186	300	44	615	1356	D	B	71 B
245/45ZRF18 RFT	Alventi	96	Y	300	186	300	44	810	1786	D	B	71 B
255/45ZRF18 RFT	Alventi	105 XL	W	270	168	340	49	875	1929	D	B	73 B
225/45ZRF19 RFT	Alventi	92	W	270	168	340	49	710	1565	D	B	71 B
235/45RF19 RFT	Alventi	95	V	240	149	300	44	690	1521	D	B	71 B
245/45ZRF19 RFT	Alventi	102 XL	Y	300	186	340	49	850	1874	D	B	72 B
255/45ZFR20 RFT	Alventi	105 XL	Y	300	186	340	49	925	2039	D	B	73 B
215/40ZRF18 RFT	Alventi	85	Y	300	186	300	44	515	1135	D	B	71 B
225/40ZRF18 RFT	Alventi	92 XL	Y	300	186	340	49	630	1389	D	B	72 B
245/40ZRF18 RFT	Alventi	93	Y	300	186	300	44	650	1433	D	B	71 B
255/40ZRF18 RFT	Alventi	95	W	270	168	300	44	690	1521	D	B	72 B
225/40ZRF19 RFT	Alventi	93 XL	Y	300	186	340	44	650	1433	D	B	72 B
245/40ZRF19 RFT	Alventi	98 XL	Y	300	186	340	49	750	1653	D	B	72 B
255/40ZRF19 RFT	Alventi	100 XL	Y	300	186	340	49	800	1764	D	B	73 B
275/40ZRF19 RFT	Alventi	101	Y	300	186	300	44	825	1819	D	B	72 B
245/40ZRF20 RFT	Alventi	99 XL	Y	300	186	340	49	775	1709	D	B	72 B
255/35ZRF18 RFT	Alventi	90	Y	300	186	300	44	600	1323	D	B	72 B
255/35ZRF19 RFT	Alventi	96 XL	Y	300	186	340	49	710	1565	D	B	73 B
275/35ZRF19 RFT	Alventi	100 XL	Y	300	186	340	49	800	1764	D	B	73 B
275/35ZRF20 RFT	Alventi	102 XL	Y	300	186	340	49	850	1874	D	B	73 B
235/55ZRF18 RFT	Impero	100	W	270	168	300	44	800	1764	D	B	71 B
255/55RF18 RFT	Impero	109 XL	V	240	149	340	49	1030	2271	D	B	73 B
235/55RF19 RFT	Impero	101	V	240	149	300	44	825	1819	D	B	71 B
225/50ZRF18 RFT	Impero	95	W	270	168	300	44	690	1521	D	B	71 B
235/50ZRF18 RFT	Impero	101 XL	W	270	168	340	49	825	1819	D	B	72 B
245/50ZRF18 RFT	Impero	100	Y	300	186	300	44	800	1764	D	B	71 B
245/50ZFR19 RFT	Impero	105 XL	W	270	168	340	49	925	2039	D	B	72 B
255/50ZRF19 RFT	Impero	103	W	270	168	300	44	875	1929	D	B	72 B
275/40ZRF20 RFT	Impero	106 XL	W	270	168	340	49	950	2094	D	B	73 B
315/35ZRF20 RFT	Impero	110 XL	W	270	168	340	49	1060	2337	D	B	75 B