

USEFUL INFORMATION

HOW TO SELECT A TYRE

Tyre size and maximum speed of the vehicle.
The maximum load capacity per axle (Load index).
Your style driving and road condition.

MOUNTING & DISMOUNTING

Only get trained people mounting and dismounting your tyres.

TYRE PRESSURE

For safe drive, it is extremely important to drive with the right pressure.

CHECK FOLLOWING ITEMS IN REGULAR WAY

Tread Pattern


Unusual wear, tread groove separation, bulges.. etc.

Sidewall

Impact, Bulges, Ozone cracking, vehicle contact damage etc.

Pressure

The inflated pressure will be changed during long driving and changed circumstances temperature.



DISTRIBUTED BY

These data can be changed by the manufacturer without prior notice and differently applied by regions.

Printed on Jun. 2023

TOLEDO
CAR TYRES

DRIVING WITH ENERGY


2023
Products Manual

www.toledo-tyres.com
www.facebook.com/ToledoTireGlobal

WHY TOLEDO



- All size tested & approved according to Regulation of (EU) No.2020/740 and registered by EPREL regarding Wet Grip, Rolling Resistance, External Noise , Snow Grip & Ice Grip which Stipulated by Europe Union.
- Design engineering from Europe, using the most up to date design technology available.
- Certification for each market are available.
- Over 200 sizes available, with many more to be introduced shortly.
- Exclusive distribution available and full market support assured.
- Direct factory program, ensuring steady supply with competitive price.

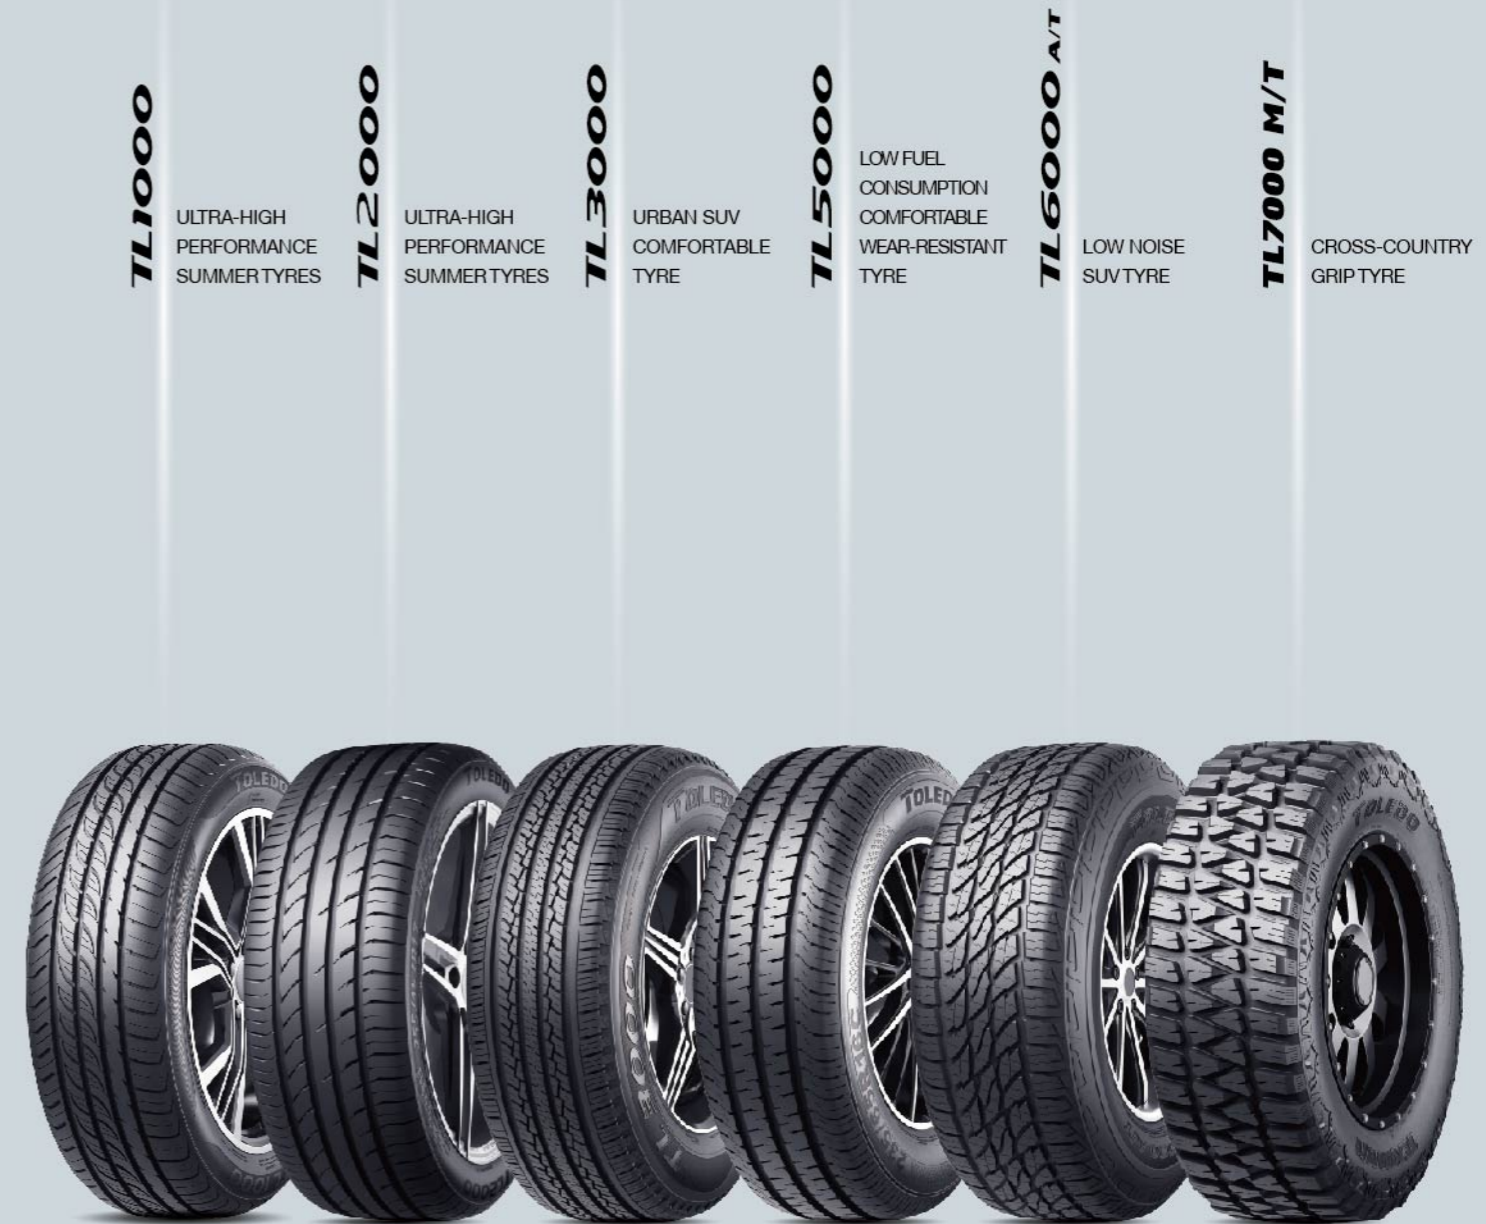



TL1000



- Advanced asymmetrical tread design gives this ultra high performance summer tyre excellent handling and cornering response with excellent durability.
- Special tread compound and multi-pitch tread block ensure confident noise & good traction in both wet/dry conditions.
- Continuous 3-center ribs with optimal block distribution help directnal driving stability at high speed.

Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
155/80R13	79T	437	190	300	D	C	70B
155/70R13	75T	387	190	300	D	C	70B
165/70R13	79T	437	190	300	D	C	70B
175/70R13	82T	475	190	300	D	C	70B
185/70R13	86T	530	190	300	C	B	70B
165/70R14	81T	462	190	300	D	C	70B
175/70R14	84T	500	190	300	C	C	70B
185/70R14	88 H	560	210	300	C	B	70B
195/70R14	91H	615	210	300	C	B	71B
205/70R15	96H	710	210	300	C	B	71B
215/70R15	98H	750	240	300	C	B	71B
155/65R13	73T	365	190	300	D	C	70B
155/65R14	75T	387	190	300	D	C	70B
165/65R13	77T	412	190	300	D	C	70B
175/65R13	80T	450	190	300	D	C	70B
175/65R14	82 H	475	210	300	C	C	70B
185/65R14	86 H	530	210	300	C	B	70B
175/65R15	84H	500	210	300	C	C	70B
185/65R15	88 H	560	210	300	C	B	70B
195/65R15	91H	615	210	300	C	B	71B
205/65R15	94 V	670	240	300	C	B	71B
215/65R15	96H	710	210	300	C	B	71B
175/60R13	77T	412	190	300	D	C	70B
165/60R14	75H	387	210	300	D	C	70B
185/60R14	82 H	475	210	300	D	B	70B
195/60R14	86 H	530	210	300	D	B	71B
185/60R15	84H	500	210	300	D	B	70B
195/60R15	88V	560	240	300	C	B	71B
205/60R15	91V	615	240	300	C	B	71B
195/60R16	89H	580	210	300	C	B	71B
205/60R16	92 V	630	240	300	C	B	71B
215/60R16	99V XL	775	240	340	C	B	71B
225/60R16	98 H	750	210	300	C	B	71B
185/55R15	82V	475	240	300	D	B	70B
195/55R15	85V	515	240	300	D	B	71B
185/55R16	87V XL	545	240	340	C	B	70B
195/55R16	87V	545	240	300	D	B	71B
205/55R16	91V	615	240	340	C	B	71B
205/55ZR16	94W XL	670	270	340	C	B	71B
215/55ZR16	97W XL	730	270	340	C	B	71B
225/55R16	99V XL	775	240	340	C	B	71B
205/55ZR17	95W XL	690	270	340	C	B	71B
215/55ZR17	98W XL	750	270	340	C	B	71B
225/55ZR17	101W XL	825	270	340	C	B	71B
235/55ZR17	103W XL	875	270	340	B	B	71B

Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
245/55ZR19	103 W	875	270	300	D	B	71B
195/50R15	82V	475	240	300	D	B	71B
185/50R16	85V XL	515	240	340	D	B	70B
195/50R16	84V	500	240	300	D	B	71B
205/50ZR16	87W	545	270	300	D	B	71B
225/50ZR16	96W XL	710	270	340	C	B	71B
205/50ZR17	93W XL	650	270	340	C	B	71B
215/50ZR17	95W XL	690	270	340	C	B	71B
225/50ZR17	98W XL	750	270	340	C	B	71B
235/50ZR17	100W XL	800	270	340	C	B	71B
235/50ZR18	101W XL	825	270	340	C	B	71B
285/50R20	116V XL	1250	240	340	B	B	73B
195/45R16	84V XL	500	240	340	D	B	71B
205/45ZR16	87W XL	545	270	340	C	B	71B
215/45R16	90V XL	600	240	340	C	B	71B
205/45ZR17	88W XL	560	270	340	C	B	71B
215/45ZR17	91W XL	615	270	340	C	B	71B
225/45ZR17	94W XL	670	270	340	C	B	71B
235/45ZR17	97W XL	730	270	340	C	B	71B
245/45ZR17	99W XL	775	270	340	C	B	71B
225/45ZR18	95W XL	690	270	340	C	B	71B
235/45ZR18	98Y XL	750	300	340	C	B	71B
245/45ZR18	100W XL	800	270	340	C	B	71B
255/45ZR18	103W XL	875	270	340	C	B	72B
245/45ZR20	99W	775	270	300	C	B	71B
265/45ZR20	104W	900	270	300	C	B	72B
275/45R20	110V XL	1060	240	340	C	B	72B
205/40ZR17	84W XL	500	270	340	C	B	71B
215/40ZR17	87W XL	545	270	340	C	B	71B
245/40ZR17	95W XL	690	270	340	C	B	71B
225/40ZR18	92W XL	630	270	340	D	B	71B
235/40ZR18	95W XL	690	270	340	D	B	71B
245/40ZR18	97W XL	730	270	340	C	B	71B
255/40ZR19	100W XL	800	270	340	C	B	72B
275/40ZR20	106Y XL	950	300	340	C	B	72B
215/35ZR18	84W XL	500	270	340	D	B	71B
255/35ZR18	94W XL	670	270	340	D	B	72B
225/35ZR19	88W XL	560	270	340	D	B	71B
235/35ZR19	91W XL	615	270	340	D	B	71B
245/35ZR19	93W XL	650	270	340	D	B	71B
255/35ZR19	96Y XL	710	300	340	C	B	72B
255/35ZR20	97W XL	730	270	340	C	B	72B
315/35ZR20	110Y XL	1060	300	340	C	B	73B
285/35ZR22	112W XL	1120	270	340	C	B	73B
265/30ZR19	93W XL	650	270	340	D	B	72B
275/30ZR19	96W XL	710	270	340	D	B	72B

TOLEDO

TL2000



- Excellent asymmetric pattern arranged with different pitch size, number and sorting between inside & outside.
- 4 longitudinal performance main grooves provide pretty capability of water drainage quickly, wet braking and hydroplaning resistant.
- New generation high silica formula much improves grip braking and traction on road condition, also better mileage than old compounding.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
225/55R19	99V	775	240	300	C	B	71B
235/55R19	105V XL	925	240	340	C	B	72B
255/55R19	111V XL	1090	240	340	C	B	73B
235/50R19	99V	775	240	300	D	B	71B
245/50R20	102V	850	240	300	C	B	71B
255/45ZR17	98W	750	270	300	D	B	72B
245/45ZR19	98Y	750	300	300	D	B	71B
255/45R19	100V	800	240	300	D	B	72B
255/40ZR18	95Y	690	300	300	D	B	72B
245/40ZR19	98Y XL	750	300	340	C	B	72B
275/40ZR19	101Y	825	300	300	D	B	72B
275/35ZR19	100Y XL	800	300	340	D	B	73B



TL3000



- An ideal choice for both city and effortless long distance driving , providing extra long mileage, a comfortable ride and high levels of all season grip.
- Low noise levels, steering precision, exceptional cornering ability and ease of handling exemplify even on powerful SUVs and light trucks.
- Four straight wide grooves –provide excellent water drainage and anti-hydroplaning performance .

Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
215/75R15	100H	800	210	300	D	C	71 B
225/75R15	102H	850	210	300	D	C	71 B
235/75R15	105H	925	210	300	D	C	71 B
225/70R15	100H	800	210	300	D	C	71 B
265/70R15	110H	1060	210	300	D	C	72 B
215/70R16	100H	800	210	300	D	C	71 B
235/70R16	109 H XL	950	210	340	D	C	71 B
245/70R16	111H XL	1090	210	340	C	C	72 B
255/70R16	111T	1090	190	300	D	C	72 B
265/70R16	112H	1120	210	300	D	C	72 B
275/70R16	114H	1180	210	300	D	C	72 B
225/70R17	108 T XL	1000	190	340	C	C	71 B
235/70R17	111 H XL	1090	210	340	C	C	72 B
245/70R17	108T	1000	190	300	C	C	71 B
255/70R17	112T	1120	190	300	C	C	72 B
215/65R16	98H	750	210	300	D	C	71 B
225/65R16	100H	800	210	300	D	C	71 B
235/65R16	103T	875	190	300	D	C	71 B
255/65R16	109H	1030	210	300	D	C	72 B
225/65R17	102H	850	210	300	D	C	71 B
235/65R17	108 H XL	1000	210	340	C	C	72 B

Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
245/65R17	107H	975	210	300	D	C	71 B
255/65R17	110H	1060	210	300	C	C	72 B
265/65R17	112H	1120	210	300	D	C	72 B
275/65R17	115H	1215	210	300	D	B	72 B
285/65R17	116H	1250	210	300	D	C	73 B
235/65R18	110 V XL	1060	240	340	C	C	72 B
205/60R16	96 V XL	710	240	340	D	C	71 B
225/60R16	98H	750	210	300	D	C	71 B
235/60R16	100H	800	210	300	D	C	71 B
215/60R17	96H	710	210	300	D	C	71 B
225/60R17	99H	775	210	300	D	C	71 B
235/60R17	102 H	950	240	340	D	C	71 B
275/60R17	110 H	1060	210	300	D	B	72 B
225/60R18	100H	800	210	300	C	C	71 B
235/60R18	103H	875	210	300	C	C	71 B
245/60R18	104H	900	210	300	D	C	71 B
265/60R18	110V	1060	240	300	D	C	72 B
285/60R18	120H XL	1380	240	340	C	C	73 B
215/55R18	99V XL	775	270	340	C	C	71 B
235/55R18	104 V XL	900	240	340	C	C	72 B
255/55R18	109 V XL	1030	270	340	C	C	72 B
255/50R19	103V	975	300	340	D	C	72 B



TL5000



- Compact shoulder design to improving stability on shoulder area.
- Special optimized sipes design on mid of tread ,provide extra grip capability and braking performance.
- Special tread compound reduces fuel consumption and increases higher mileage.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
155R13C-6PR	85/83 S	515/487	180	300	D	C	72 B
165R13C-8PR	94/93 R	670/650	170	450	D	C	72 B
175R13C-8PR	97/95 S	730/690	180	450	D	C	72 B
165R14C-8PR	96/95 R	710/690	170	450	D	C	72 B
175R14C-8PR	99/98 R	775/750	170	450	D	C	72 B
185R14C-8PR	102/100 Q	850/800	160	450	C	C	72 B
195R14C-8PR	106/104Q	950/900	160	450	C	C	72 B
205R14C-8PR	109/107S	1030/975	180	450	C	C	72 B
185R15C-8PR	103/102 R	875/850	170	450	C	C	72 B
195R15C-8PR	106/104Q	950/900	160	450	C	C	72 B
185/75R16C-8PR	104/102R	900/850	170	450	C	C	72 B
195/75R16C-8PR	107/105R	975/925	170	475	C	C	72 B
215/75R16C-8PR	113/111R	1150/1090	170	525	C	C	72 B
165/70R13C-6PR	88/86 T	560/530	180	375	D	C	72 B
175/70R14C-6PR	95/93S	690/650	180	375	D	C	72 B
195/70R15C-8PR	104/102R	900/850	170	450	C	C	72 B
205/70R15C-8PR	106/104R	950/900	170	450	C	C	72 B
215/70R15C-8PR	109/107R	1030/975	180	450	C	C	72 B
225/70R15C-8PR	112/110S	1120/1060	180	450	C	C	72 B
195/65R16C-8PR	104/102R	900/850	170	475	C	C	72 B
205/65R16C-8PR	107/105R	975/925	170	475	C	C	72 B
215/65R16C-8PR	109/107R	1030/975	170	475	C	C	72 B
225/65R16C-8PR	112/110R	1120/1060	170	475	C	C	72 B
235/65R16C-8PR	115/113R	1215/1150	170	475	C	C	72 B



TL6000 A/T

   
 Speed Wear Safe Low Fuel

M+S 

- Modern tread and sidewall lug design offers excellent all-terrain traction.
- High strength casing combined with special rubber compound improve braking, grip, wet traction and tread wear.
- Advance semi-open shoulder design with multi-pitch tread block reduced road noise.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
215/85R16LT	115/112S	1215/1120	180	550	D	C	73 B
235/85R16LT	120/116S	1380/1250	180	550	D	C	73 B
215/75R15LT	106/103S	950/875	180	450	D	C	73 B
225/75R15LT	108/104S	1000/900	180	450	D	C	73 B
235/75R15LT	110/107S	1060/975	180	450	D	C	73 B
225/75R16LT	115/112S	1215/1120	180	550	D	C	73 B
245/75R16LT	120/116S	1380/1250	180	550	D	C	73 B
265/75R16LT	123/120S	1550/1380	180	550	D	C	75 B
285/75R16LT	126/123R	1700/1550	170	550	D	C	75 B
245/75R17LT	121/118S	1450/1320	180	550	D	C	73 B
265/70R16LT	121/118R	1450/1320	170	550	D	C	73 B
265/70R17LT	121/118S	1450/1320	180	550	D	C	73 B
285/70R17LT	121/118S	1450/1320	180	550	D	C	73 B
275/65R18LT	123/120S	1550/1380	180	550	D	C	75 B
215/70R16	99T	775	190	300	D	D	71 B
225/70R16	101T	825	190	300	D	D	71 B
235/70R16	104T	900	190	300	D	D	71 B
245/70R16	106T	950	190	300	D	D	71 B
255/70R16	109T	1030	190	300	D	D	72 B
265/70R16	111T	1090	190	300	D	D	72 B
265/70R17	113T	1150	190	300	D	D	72 B
265/65R17	110T	1060	190	300	D	D	72 B
275/65R17	113T	1150	190	300	D	D	72 B
31x10.50R15LT	109S	1030	180	350	D	C	73 B



TL7000 M/T



Wear



Safe



Comfort

M+S



- Specially designed tread block provide better grip in mud , sand and snow.
- Unique stone-ejector grooves along with a rugged shoulder help to prevent damage from impact.
- Optimized void-to-rubber ratio provides excellent traction.
- Large surface area tread blocks provide increased grip.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)
LT265/75R16-10PR	123/120Q	1550/1400	160	550/550
LT285/75R16-10PR	126/123Q	1700/1550	160	550/550
LT265/70R17-10PR	121/118Q	1450/1320	160	550/550
LT285/70R17-10PR	121/118Q	1450/1320	160	550/550
LT295/70R17-10PR	121/118Q	1450/1320	160	550/550
LT275/65R18-10PR	123/120Q	1550/1400	160	550/550
LT285/55R20-10PR	122/119Q	1500/1360	160	550/550
33x12.50R17LT-10PR	120Q	1400	160	450
33x12.50R18LT-10PR	118Q	1320	160	450
33x12.50R20LT-10PR	114Q	1180	160	450



Blue Snow



- V-direction studdable tread design for excellent traction on snowy and icy.
- Unique tread pattern design with specially formulated soft tread compound enhances snow handling and braking performance.
- High-density lateral sipes for superior grip and quiet smooth ride.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
175/65R14	82H	475	210	300	D	D	69B
185/65R14	86H	530	210	300	D	D	69B
185/65R15	88H	560	210	300	D	D	69B
195/65R15	91V	615	240	300	D	D	70B
205/65R15	94H	670	210	300	D	C	70B
215/65R16	98H	750	210	300	D	C	71B
185/60R14	82H	475	210	300	D	D	69B
195/60R15	88H	560	210	300	D	D	70B
205/60R16	96H XL	710	210	340	C	C	70B
215/60R16	99H XL	775	210	340	C	C	71B
195/55R15	85H	515	210	300	D	D	70B
205/55R16	91H	615	210	300	D	C	70B
215/55R16	97V XL	730	240	340	C	C	71B
225/55R16	99V XL	775	240	340	C	C	71B
255/55R18	109V XL	1030	240	340	C	C	72B
225/45R17	94V XL	670	240	340	C	C	71B
245/45R18	100V XL	800	240	340	C	C	71B
225/40R18	92H XL	630	210	340	D	C	71B



ECOSNOW 4x4



- New design giving excellent traction on all road conditions affected by snow, ice, water and mud.
- Dual stability solid central ribs - sharpens steering response .
- Widely spaced tread blocks – aggressively profiled for carving through snow and clearing it out of the grooves.
- Special silica soft compound, with 5 wide circumferential grooves providing excellent traction on wet roads.



Size	LI/SI	Max. Load (kg)	Max. Speed (km/h)	Max. Pressure (Kpa)	RR	Wet Grip	Noise
215/70R16	100T	800	190	300	D	D	72 B
235/70R16	106T	950	190	300	D	D	72 B
245/70R16	107T	975	190	300	D	D	72 B
265/70R16	112T	1120	190	300	D	C	73 B
255/65R16	109T	1030	190	300	D	C	73 B
235/65R17	108H XL	1000	210	340	D	D	72 B
235/60R16	100H	800	210	300	D	D	72 B
225/60R17	99H	775	210	300	D	D	72 B