

USEFUL INFORMATION

HOW TO SELECT A TYRE

Tyre size and maximum speed of the vehicle.
The maximum load capacity per axle (Load index).
Your driving style and road condition.

MOUNTING & DISMOUNTING

Only get trained people mounting and dismounting your tyres.

TYRE PRESSURE

For safe driving, it is extremely important to drive with the right pressure.

CHECK FOLLOWING ITEMS REGULARLY

Tread Pattern


Unusual wear, tread groove separation, bulges, etc.

Sidewall

Impact, bulges, ozone cracking, vehicle contact damage etc.

Pressure

Tyre pressure may change during long-distance driving or due to changing temperature conditions.

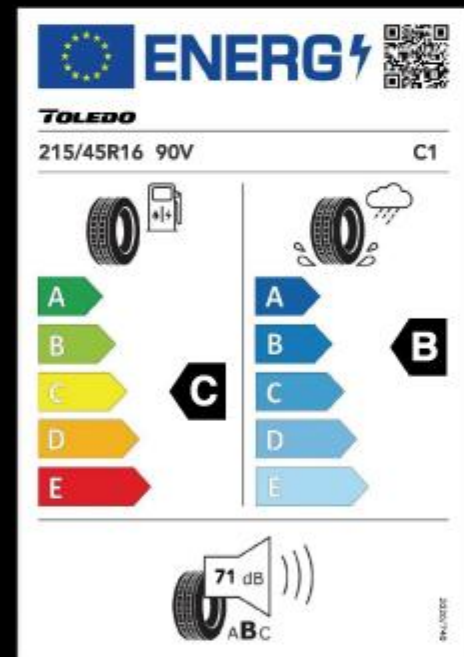

DISTRIBUTED BY

The data can be changed by the manufacturer without prior notice and may differ by regions.




TOLEDO

2026 PRODUCTS MANUAL

www.toledo-tyres.com

PRODUCTS MAP

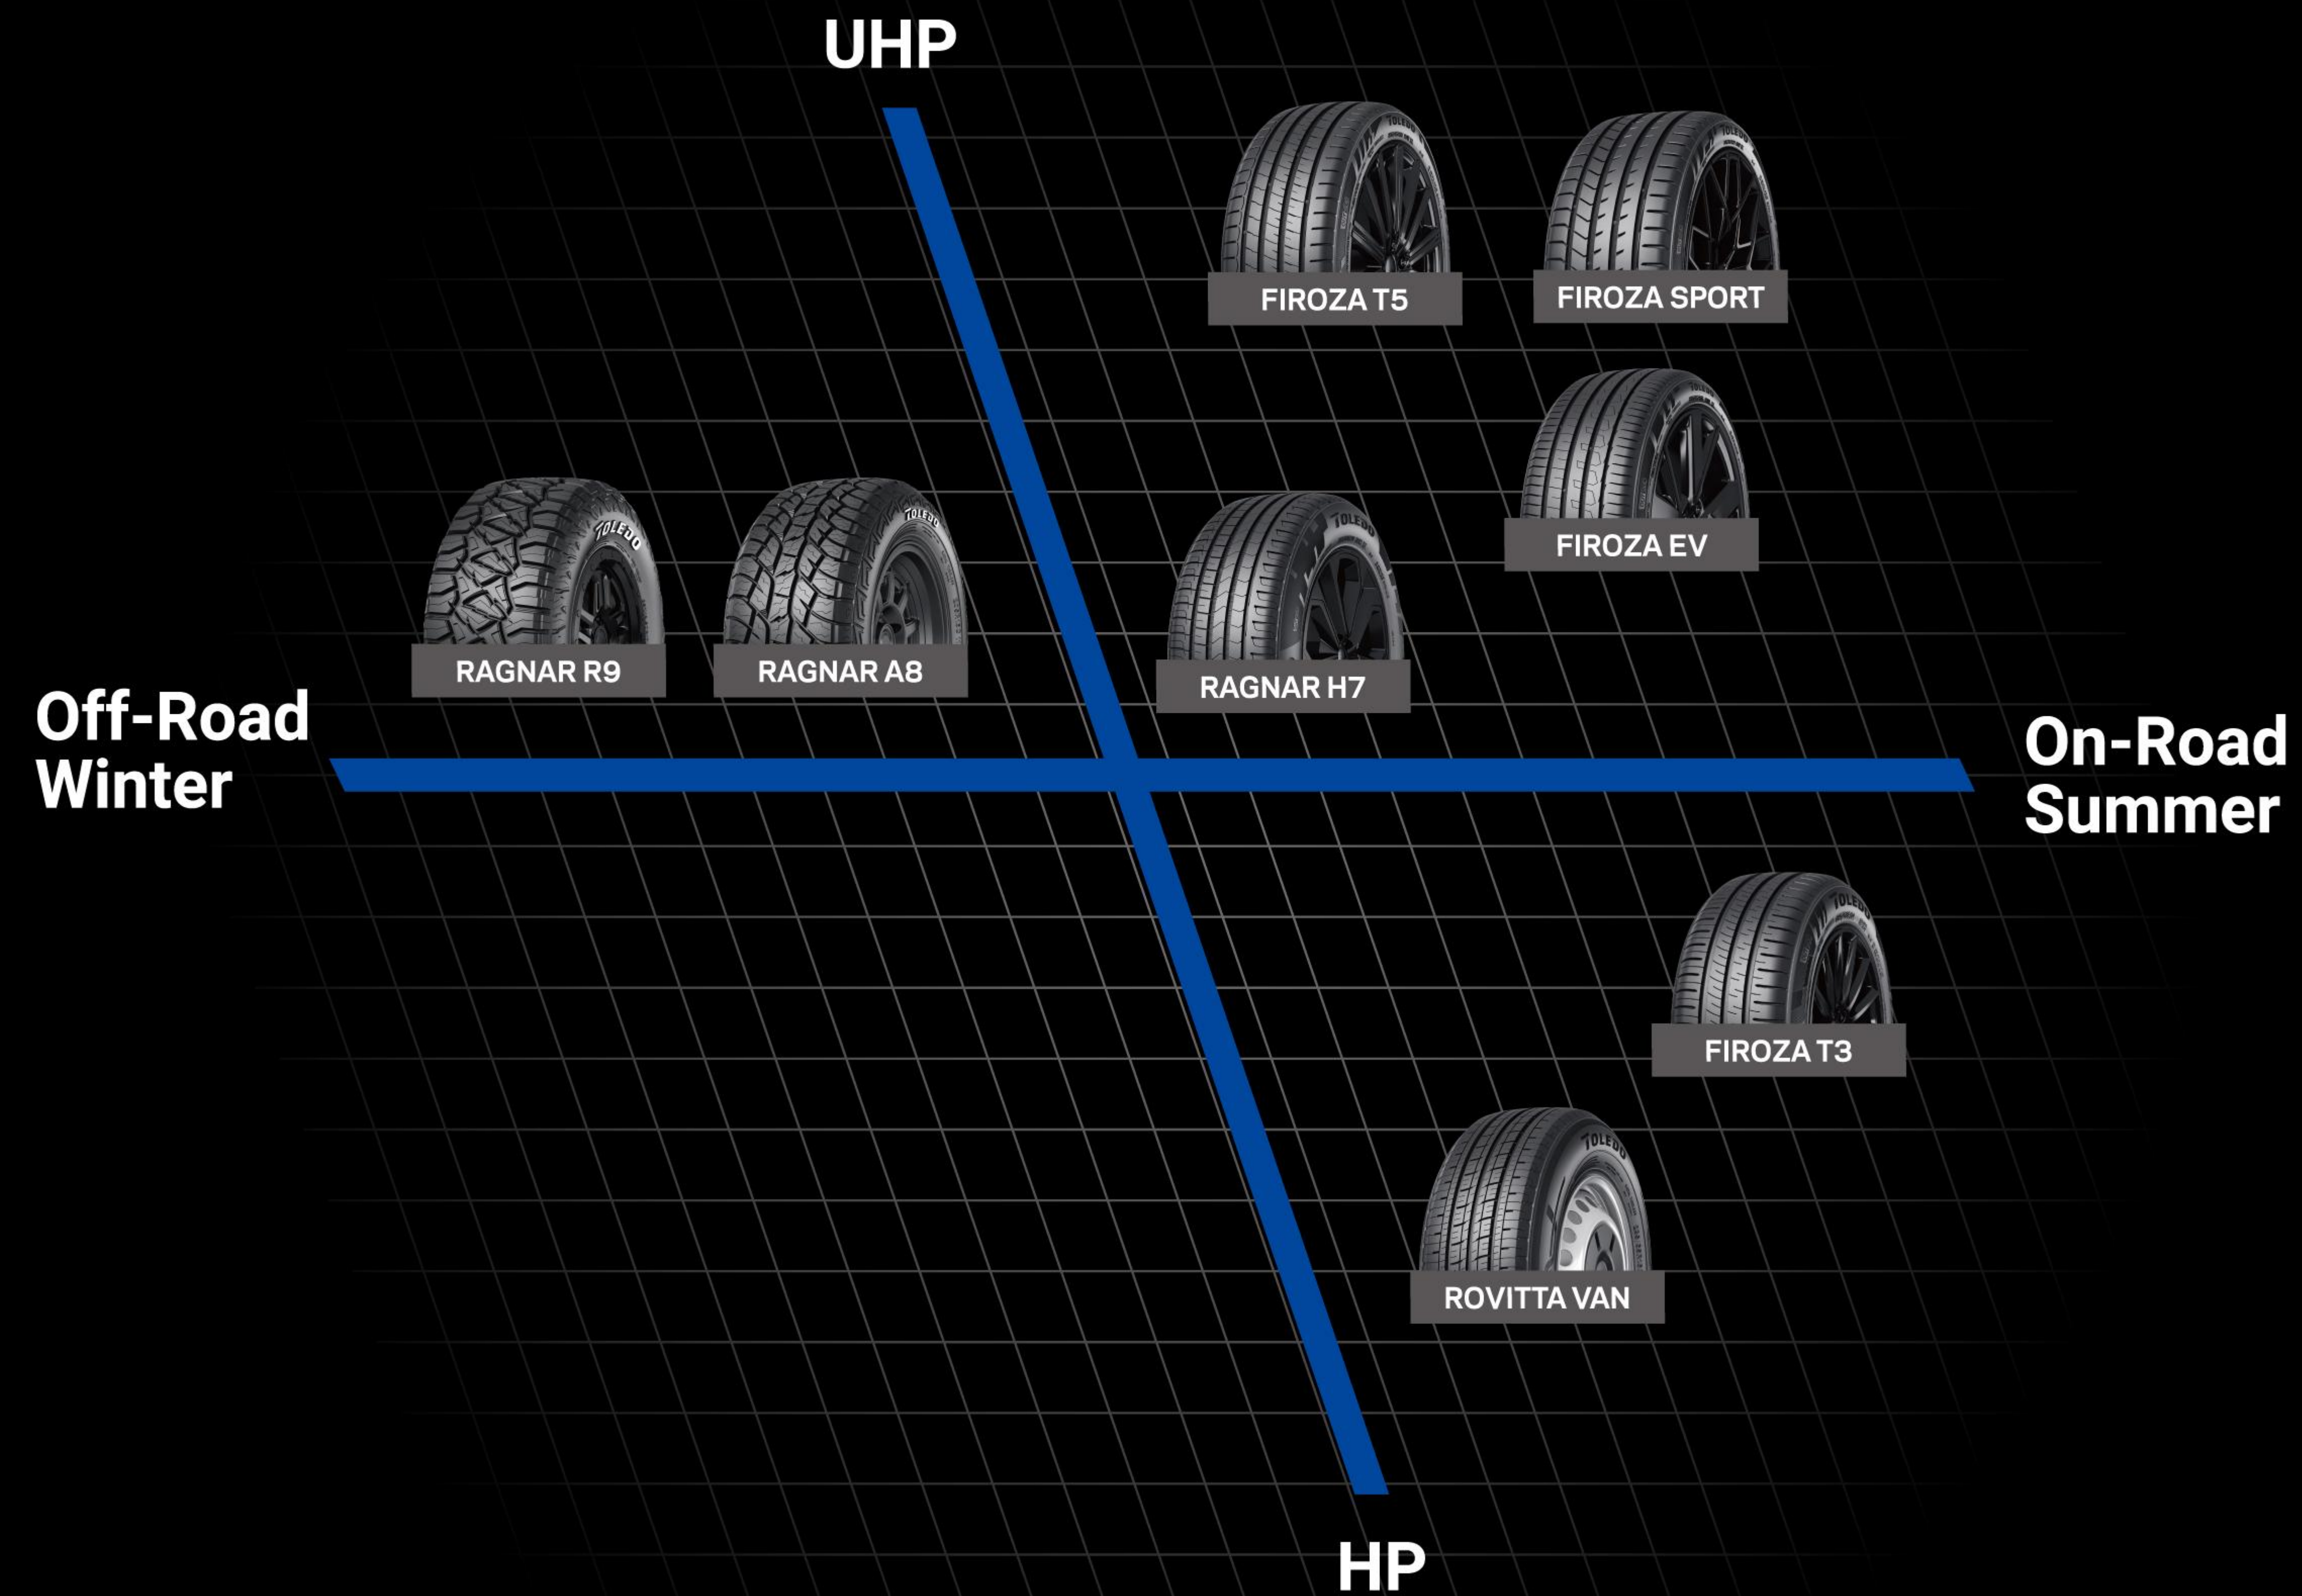

WHY BUY FROM TOLEDO

BRAND INTRODUCTION

- Launched in 2008 as one of the tyre brand family of SD International with a reliable guaranteed quality.
- Design engineering from Europe, using the most up to date design technology available.
- All size tested & approved according to Regulation of (EU)No.2020/740, and certification for each market are available.
- Over 200 sizes available, with many more to be introduced shortly.
- Exclusive distribution available and full market support assured.
- Direct factory program, ensuring steady supply, solid quality with competitive price.

DRIVING WITH
ENERGY

HP	FIROZA T3	05
EV	FIROZA EV	07
UHP	FIROZA T5 FIROZA SPORT	09 11
HT	RAGNAR H7	15
VAN	ROVITTA VAN	17
AT	RAGNAR A8	19
RT	RAGNAR R9	21




High Fuel Efficiency

The optimized tread groove design and profile design. The application of a low rolling resistance formula, effectively reduces the rolling resistance of the tyres.



Powerful Grip of Dry/Wet Road

Designed with narrow sipes for optimal wet performance. The advanced silica compound significantly enhances road adhesion.

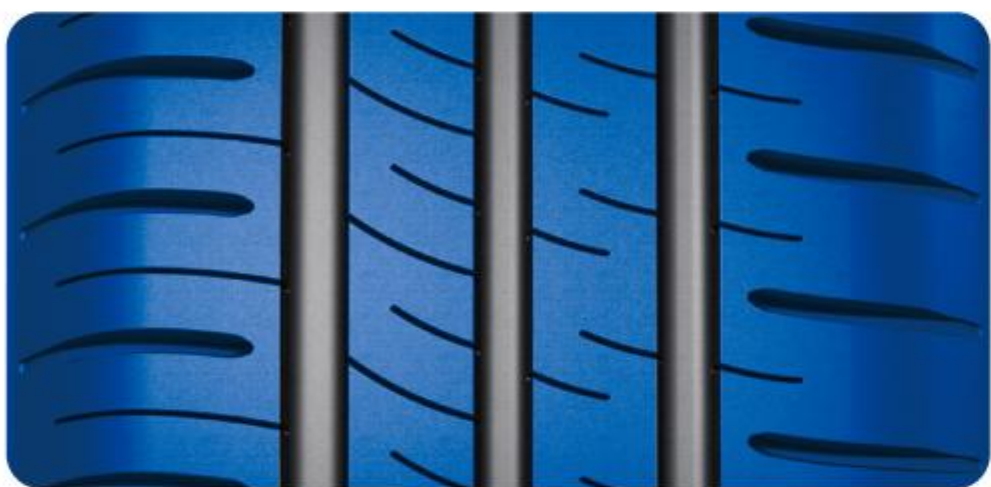

Exceptional Water Dispersion

High-efficiency drainage capability drastically reduces hydroplaning risks, maintaining driving stability even in heavy rain conditions.



Multi-level Silence Design

Design of variable pitch pattern and the noise jammer in groove at the bottom can effectively reduce the rolling noise.

FIROZA T3

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
155/70R13	75	T	300	44	387	853	400/A/A
165/70R13	79	T	300	44	437	963	400/A/A
175/70R13	82	T	300	44	475	1047	400/A/A
165/70R14	85XL	T	340	50	515	1135	400/A/A
175/70R14	88XL	T	340	50	560	1235	400/A/A
185/70R14	88	T	300	44	560	1235	400/A/A
165/65R14	79	T	300	44	437	963	400/A/A
175/65R14	86XL	T	340	50	530	1168	400/A/A
185/65R14	86	H	300	44	530	1168	400/A/A
185/60R14	82	H	300	44	475	1047	400/A/A
165/60R14	75	H	300	44	387	853	400/A/A

TOLEDO

FIROZA EV


TAKE YOU TO EVERY FARAWAY PLACE

FIROZA EV delivers outstanding safety and control not only on slippery roads and high-speed corners, but also excels in energy efficiency with reduced rolling resistance. Whether for urban commuting or long-distance travel, FIROZA EV offers a quiet, comfortable, and highly efficient electric driving experience.



Extended Range Performance

Advanced low-energy rolling technology reduces power consumption, supporting longer EV range and easing range anxiety.

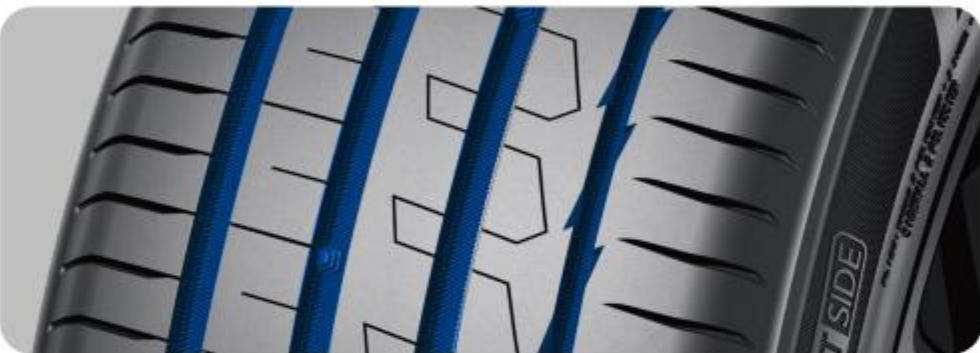


Enhanced Tread Life

Deeper tread grooves provide longer mileage for the tyre.



Quiet Driving Experience

- New-generation compound technology effectively suppresses road noise, creating a serene and pleasant in-cabin atmosphere.
- Special noise jammer and serrated line design improve significantly the rolling noise.

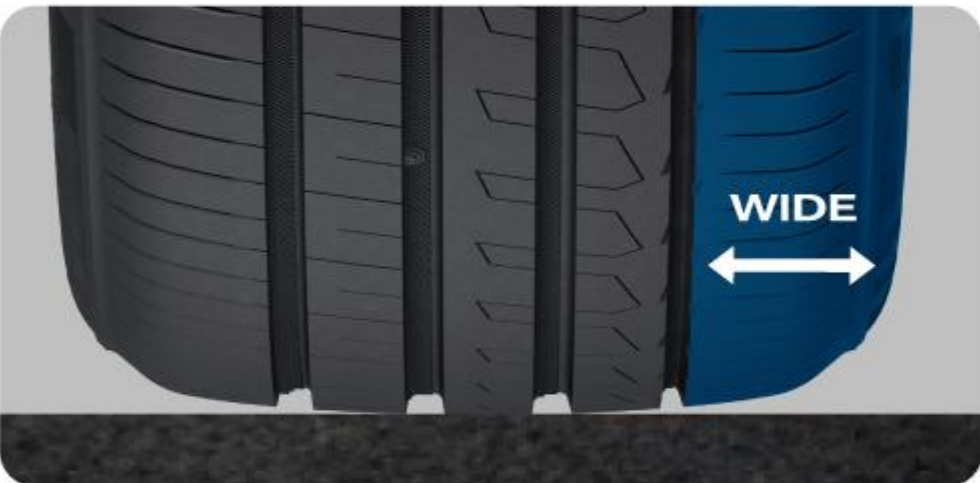

Excellent Carrying Capacity

- Double-layer reinforced sidewall design can provide more load capacity.
- Strengthened sidewall design with high-tensile fibers enhances load-bearing capacity for heavy EV batteries, while improving steering response and straight-line stability.


Speed


Quiet


Comfort


Wear



FIROZA EV

Size	Load Index	Speed	Max. Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
175/70R14	88XL	T	340	50	560	1235	600/AA
185/65R15	88	H	300	44	560	1235	600/AA
185/65R15LT	99/96	S	550	80	775/710	1709/1565	-
195/65R15	91	H	300	44	615	1356	600/AA
185/60R15	88XL	H	340	50	560	1235	600/AA
195/60R16	89	H	300	44	580	1279	600/AA
205/60R16	92	H	300	44	630	1389	600/AA
225/60R16	98	V	300	44	750	1653	600/AA
205/55R16	91	H	300	44	615	1356	600/AA
215/55R17	94	V	300	44	670	1477	600/AA
215/55R18	99XL	V	340	50	775	1709	600/AA
235/55ZR18	104XL	W	340	50	900	1984	600/AA
205/50R17	93XL	H	340	50	650	1433	600/AA
215/50R17	95XL	H	340	50	690	1521	600/AA
235/45ZR18	98XL	W	340	50	750	1653	600/AA

TOLEDO

FIROZA TS

MASTER EVERY JOURNEY WITH PRECISION

Delivers exceptional control and stability in wet and high-speed conditions, while ensuring a remarkably quiet and comfortable driving experience. Engineered for performance enthusiasts, it consistently provides confident and high-performance handling.



Speed




Quiet



Comfort



Anti-skid

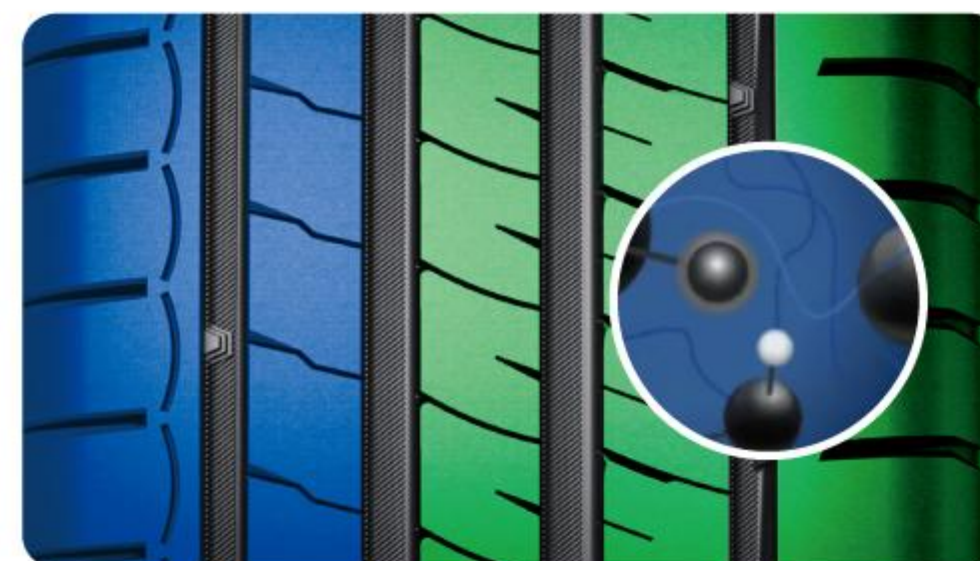

Quiet and Comfortable Ride

- New-generation compound technology effectively suppresses road noise, creating a serene and pleasant in-cabin atmosphere.
- Special noise jammer and serrated line design reduce significantly the rolling noise.
- High elasticity tread structure design can effectively absorb road vibrations, providing a comfortable ride.



Excellent Wet/Dry Grip for Driving Smoothly

- Designed with four longitudinal grooves to strengthen straight-line water evacuation, offering superior wet-weather drainage performance.
- Combining multiple transverse grooves with wide longitudinal grooves improves water evacuation efficiency and enhances wet/dry grip and overall driving stability.



Superior Cornering Stability

- A wide shoulder structure reduces tread deformation during cornering, offering greater composure at high speeds and boosting driver confidence.
- Special beam design in the bottom enhances the strength of shoulder block while cornering.

FIROZA TS

Size	Load Index	Speed	Max.Pressure S(kpa)	Max. Load S(psi)	Max. Load S (kg)	Max. Load S(lb)	UTQG
205/70R15	96	H	300	44	710	1565	400/A/A
175/65R15	84	H	300	44	500	1102	400/A/A
185/65R15	88	H	300	44	560	1235	400/A/A
195/65R15	95XL	T	340	50	690	1521	400/A/A
205/65R15	94	V	300	44	670	1477	400/A/A
185/60R15	88XL	H	340	50	560	1235	400/A/A
195/60R15	88	V	300	44	560	1235	400/A/A
205/60R15	91	V	300	44	615	1356	400/A/A
195/60R16	89	H	300	44	580	1279	400/A/A
205/60R16	96XL	V	340	50	710	1565	400/A/A
215/60R16	99XL	H	340	50	775	1709	400/A/A
225/60R16	102XL	V	340	50	850	1874	400/A/A
185/55R15	82	V	300	44	475	1047	400/A/A
195/55R15	85	V	300	44	515	1135	400/A/A
185/55R16	87XL	V	340	50	545	1202	400/A/A
195/55R16	91XL	V	340	50	615	1356	400/A/A
205/55ZR16	94XL	W	340	50	670	1477	400/A/A
215/55ZR16	97XL	W	340	50	730	1609	400/A/A

Size	Load Index	Speed	Max.Pressure S(kpa)	Max. Load S(psi)	Max. Load S (kg)	Max. Load S(lb)	UTQG
225/55ZR16	99XL	W	340	50	775	1709	400/A/A
205/55ZR17	95XL	W	340	50	690	1521	420/A/A
215/55ZR17	94	W	300	44	670	1477	420/A/A
225/55ZR17	101XL	W	340	50	825	1819	420/A/A
195/50R15	82	V	300	44	475	1047	400/A/A
195/50R16	88XL	V	340	50	560	1235	400/A/A
205/50ZR17	93XL	W	340	50	650	1433	420/A/A
215/50ZR17	95XL	W	340	50	690	1521	420/A/A
225/50ZR17	98XL	W	340	50	750	1653	420/A/A
235/50ZR17	100XL	W	340	50	800	1764	420/A/A
195/45ZR16	84XL	W	340	50	500	1102	420/A/A
205/45ZR16	87XL	W	340	50	545	1202	420/A/A
215/45ZR16	90XL	W	340	50	600	1323	400/A/A
205/45ZR17	88XL	W	340	50	560	1235	420/A/A
215/45ZR17	91XL	W	340	50	615	1356	420/A/A
225/45ZR17	94XL	W	340	50	670	1477	420/A/A
235/45ZR17	97XL	W	340	50	730	1609	420/A/A
205/40ZR17	84XL	W	340	50	500	1102	420/A/A
215/40ZR17	87XL	W	340	50	545	1202	420/A/A

FIROZA SPORT

ENJOY IN DRIVING

Engineered for aggressive handling and high-speed driving, it delivers high grip and stability on both dry and wet surfaces, while also ensuring comfort and reduced road noise. From winding mountain roads to fast-paced urban streets, it unleashes powerful performance with precision steering response.



Speed



Quiet




Comfort



Anti-skid


Robust Handling Performance

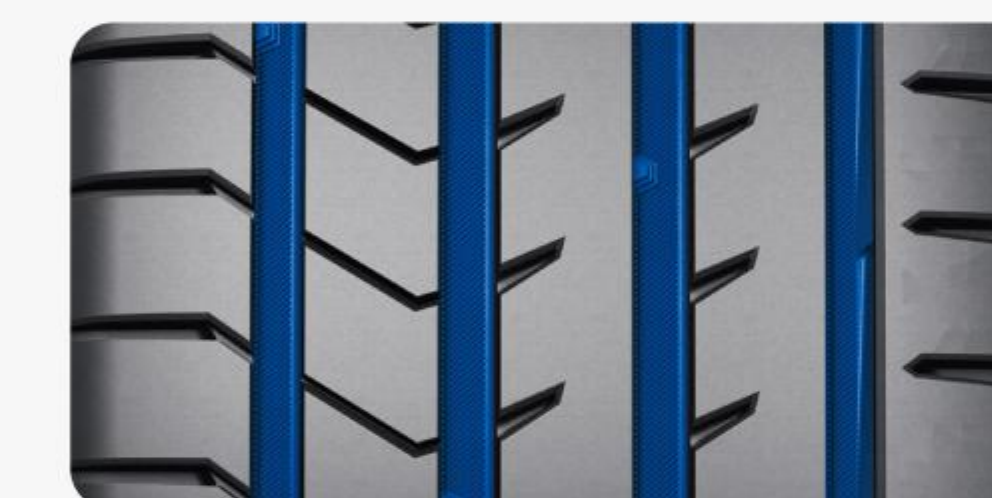

Four wide longitudinal grooves provide exceptional lateral grip at high speeds, ensuring responsive and agile driving dynamics.



Three-widened-rib design increases lateral grip at high speeds, enhancing handling performance.

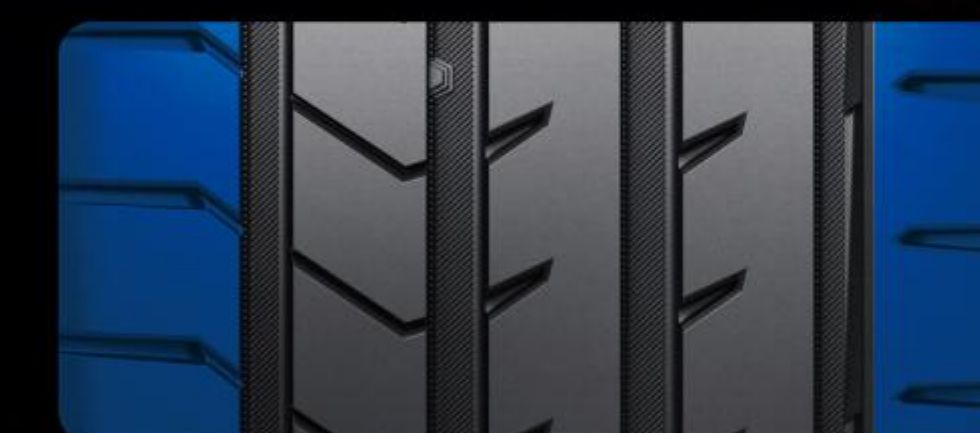

Robust Handling Performance

The dam design in the outer shoulder effectively enhances the strength of shoulder which improves the turning stability.



Stable Wet Performance

- Wide transverse groove and optimized groove angle design efficiently disperses water on slippery surfaces to prevent hydroplaning, ensuring more stable and safer handling.
- Features four continuous longitudinal grooves for enhanced straight-line water drainage, significantly improving wet traction and overall safety.



Noise Reduction Design

- Optimized tread structure reduces wind noise, creating a quieter and more comfortable sporty driving experience.
- The special noise jammer and serrated line design significantly reduce rolling noise.


Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
225/55ZR18	102XL	W	340	50	850	1874	420/A/A
225/55R19	99	V	300	44	775	1709	420/A/A
235/55R19	105XL	V	340	50	925	2039	420/A/A
245/55R19	107XL	V	340	50	975	2150	420/A/A
255/55ZR19	111XL	W	340	50	1090	2403	360/A/A
275/55ZR19	111	W	300	44	1090	2403	420/A/A
235/55ZR20	105XL	W	340	50	925	2039	360/A/A
275/55R20	117XL	V	340	50	1285	2833	420/A/A
225/50ZR18	99XL	W	340	50	775	1709	360/A/A
235/50ZR19	103XL	W	340	50	875	1929	420/A/A
245/50R19	105XL	V	340	50	925	2039	420/A/A
255/50ZR19	107XL	W	340	50	975	2150	360/A/A
265/50R19	110XL	V	340	50	1060	2337	360/A/A
235/50ZR20	104XL	W	340	50	900	1984	420/A/A
245/50ZR20	105XL	Y	340	50	925	2039	360/A/A
255/50ZR20	109XL	W	340	50	1030	2271	360/A/A
265/50R20	111XL	V	340	50	1090	2403	420/A/A
275/50R20	113XL	V	340	50	1150	2535	420/A/A
245/45ZR17	99XL	W	340	50	775	1709	420/A/A
225/45ZR18	95XL	W	340	50	690	1521	420/A/A
235/45ZR18	98XL	W	340	50	750	1653	420/A/A
245/45ZR18	100XL	W	340	50	800	1764	420/A/A
255/45ZR18	103XL	W	340	50	875	1929	420/A/A
225/45ZR19	96XL	W	340	50	710	1565	420/A/A
235/45ZR19	99XL	W	340	50	775	1709	420/A/A
245/45ZR19	102XL	W	340	50	850	1874	420/A/A
265/45ZR20	108XL	W	340	50	1000	2205	420/A/A
255/45ZR19	100	W	300	44	800	1764	360/A/A
285/45R19	111XL	V	340	50	1090	2403	420/A/A
245/45ZR20	103XL	Y	340	50	875	1929	360/A/A
255/45ZR20	105XL	W	340	50	925	2039	360/A/A
275/45ZR20	110XL	W	340	50	1060	2337	360/A/A
265/45ZR21	108XL	W	340	50	1000	2205	420/A/A
275/45ZR21	110XL	Y	340	50	1060	2337	360/A/A
245/40ZR17	91	W	300	44	615	1356	360/A/A
215/40ZR18	89XL	W	340	50	580	1279	360/A/A
225/40ZR18	92XL	W	340	50	630	1389	420/A/A
235/40ZR18	95XL	W	340	50	690	1521	420/A/A
245/40ZR18	97XL	W	340	50	730	1609	420/A/A

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
255/40ZR18	99XL	W	340	50	775	1709	420/A/A
225/40ZR19	93XL	Y	340	50	650	1433	360/A/A
235/40ZR19	96XL	W	340	50	710	1565	420/A/A
245/40ZR19	98XL	W	340	50	750	1653	420/A/A
255/40ZR19	100XL	Y	340	50	800	1764	360/A/A
275/40ZR19	105XL	W	340	50	925	2039	420/A/A
245/40ZR20	99XL	W	340	50	775	1709	420/A/A
265/40ZR21	105XL	W	340	50	925	2039	420/A/A
275/40ZR20	106XL	W	340	50	950	2094	360/A/A
305/40R20	112XL	V	340	50	1120	2469	360/A/A
275/40ZR21	107XL	W	340	50	975	2150	420/A/A
295/40ZR21	111XL	W	340	50	1090	2403	360/A/A
315/40ZR21	115XL	W	340	50	1215	2679	360/A/A
275/40ZR22	107XL	W	340	50	975	2150	360/A/A
215/35ZR18	84XL	W	300	44	500	1102	420/A/A
255/35ZR18	94XL	W	340	50	670	1477	420/A/A
265/35ZR18	97XL	W	340	50	730	1609	420/A/A
215/35ZR19	85XL	W	340	50	515	1135	420/A/A
225/35ZR19	88XL	W	340	50	560	1235	420/A/A
235/35ZR19	91XL	W	340	50	615	1356	420/A/A
245/35ZR19	93XL	W	340	50	650	1433	420/A/A
255/35ZR19	96XL	W	340	50	710	1565	420/A/A
275/35ZR19	100XL	W	340	50	800	1764	420/A/A
225/35ZR20	90XL	W	340	50	600	1323	360/A/A
245/35ZR20	95XL	W	340	50	690	1521	420/A/A
255/35ZR20	97XL	W	340	50	730	1609	420/A/A
275/35ZR20	102XL	Y	340	50	850	1874	360/A/A
315/35ZR20	110XL	W	340	50	1060	2337	420/A/A
295/35ZR21	107XL	W	340	50	975	2150	360/A/A
315/35ZR21	111XL	W	340	50	1090	2403	420/A/A
265/35ZR22	102XL	W	340	50	850	1874	360/A/A
285/35ZR22	106XL	W	340	50	950	2094	360/A/A
255/30ZR19	91XL	Y	340	50	615	1356	420/A/A
265/30ZR19	93XL	W	340	50	650	1433	360/A/A
275/30ZR19	96XL	W	340	50	710	1565	360/A/A
245/30ZR20	95XL	W	340	50	690	1521	360/A/A
275/30ZR20	97XL	Y	340	50	730	1609	360/A/A
285/30ZR20	99XL	W	340	50	775	1709	420/A/A
275/30ZR21	98XL	W	340	50	750	1653	420/A/A

RAGNAR H7


DRIVING SMOOTHLY ALL WEATHER

Perfectly integrating anti-slip drainage, rigid support, and quiet comfort, it delivers safety on wet roads and exceptional driver confidence at high speeds. Whether on long-distance cruising or daily commuting, it ensures a stable, comfortable, and long-lasting driving experience.

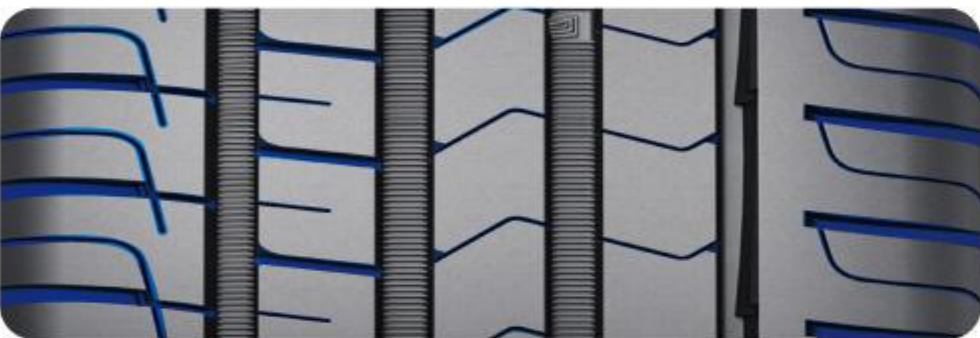

Reliable Wet/Dry Grip Performance

Anti-hydroplaning lateral grooves offer excellent wet-road performance, delivering confident grip, all-season reliability, consistent wear, smooth, and a quiet ride.

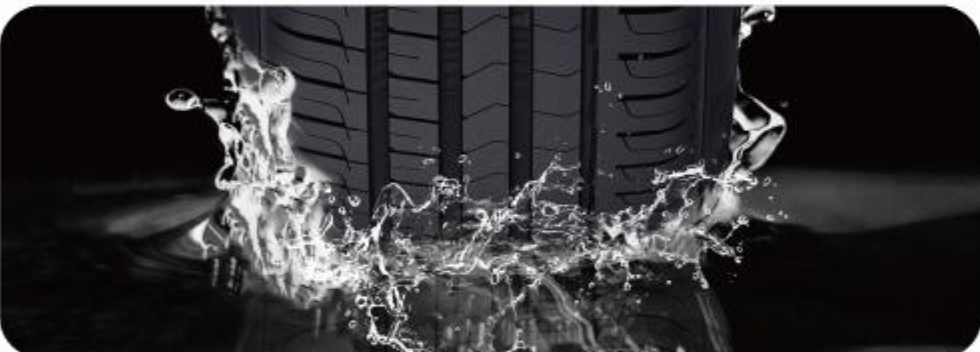


Effecient Drainage Performance

The center tread design with 3/4 allocation ensures sufficient drainage performance under rainy road condition and keeps driving rigidity under ultra high-speed service.




Perfect Cornering Performance

- The robust outer shoulder design can enhance the handling performance of the tyre during turns.
- The innovative dam design can effectively prevent the deformation of the tread blocks during turns, thereby improving the handling performance.

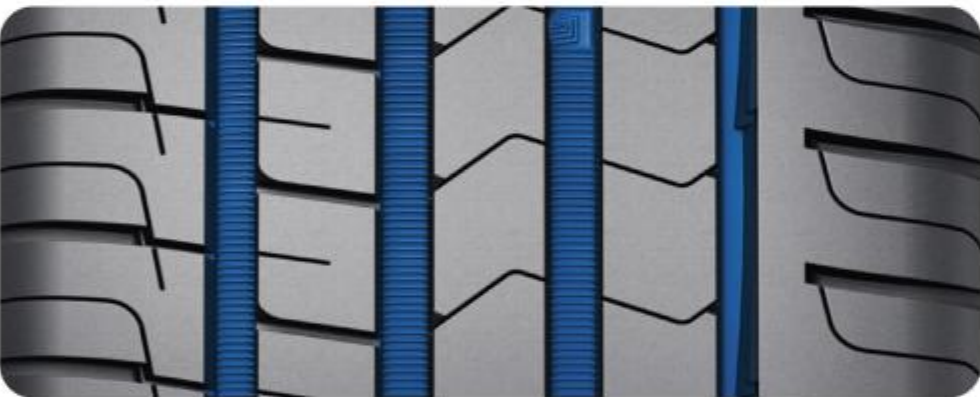

Quiet and Comfortable Ride

- New-generation compound technology effectively suppresses road noise, creating a serene and pleasant in-cabin atmosphere.
- Special noise jammer and serrated line design reduce significantly the rolling noise.

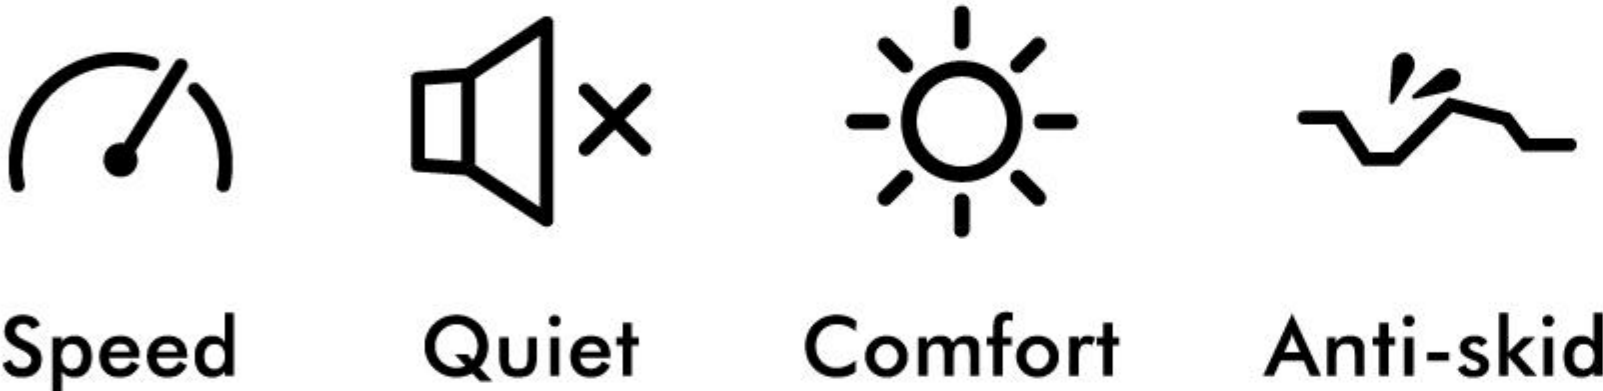

RAGNAR H7

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
215/70R16	100	H	300	44	800	1764	420/A/A
225/70R16	107XL	H	340	50	975	2149	420/A/A
235/70R16	106	H	300	44	950	2094	420/A/A
245/70R16	111XL	H	340	50	1090	2403	420/A/A
265/70R16	112	T	300	44	1120	2469	420/A/B
215/65R16	98	H	300	44	750	1653	420/A/A
215/65R17	99	V	300	44	775	1709	420/A/A
225/65R17	102	H	300	44	850	1874	420/A/A
235/65R17	104	H	300	44	900	1984	420/A/A
255/65R17	110	H	300	44	1060	2337	420/A/A
265/65R17	112	H	300	44	1120	2469	420/A/B
275/65R17	115	T	300	44	1215	2679	420/A/B
235/65R18	110XL	H	340	50	1060	2337	420/A/A
235/60R16	100	H	300	44	800	1764	420/A/A
215/60R17	96	H	300	44	710	1565	420/A/A
225/60R17	99	H	300	44	775	1709	420/A/A

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S (kg)	S(lb)	
235/60R17	106XL	H	340	50	950	2094	420/A/A
225/60R18	104XL	H	340	50	900	1984	420/A/A
235/60R18	107XL	H	340	50	975	2149	420/A/A
245/60R18	105	H	300	44	925	2039	420/A/A
255/60R18	112XL	H	340	50	1120	2469	420/A/A
265/60R18	110	H	300	44	1060	2337	420/A/A
235/60R19	107XL	H	340	50	975	2149	420/A/A
275/60R20	119XL	H	340	50	1360	2998	420/A/A
235/55ZR17	103XL	W	340	50	875	1929	420/A/A
215/55R18	99XL	V	340	50	775	1709	420/A/A
235/55R18	104XL	H	340	50	900	1984	420/A/A
255/55R18	105	V	300	44	925	2039	420/A/A
215/50ZR18	92	W	300	44	630	1389	420/A/A
235/50R18	97	V	300	44	730	1609	420/A/A
245/50ZR18	104XL	W	340	50	900	1984	420/A/A
235/75R15	105	H	300	44	925	2039	420/A/A



TOLEDO

ROVITTA VAN

DRIVE WITH EASE, SAFE AND STEADY

Specifically designed for light commercial vehicles, this tyre balances wet grip, handling stability, and durability. Ideal for both urban delivery and long-distance transport, providing efficient, safe, and long-lasting performance.



Speed



Safety



Grip



Wear



Strong Wet Grip

- Stable driving on slippery surfaces with excellent anti-skid performance to ensure transport safety.
- Three wide longitudinal grooves ensure rapid drainage during high-speed driving, significantly enhancing the wet traction and anti-skid performance of the tyres.



Long-Lasting Mileage

- Rigid tread offers high wear resistance, extending service life and reducing operational costs.
- The wide shoulder block design enhances rigidity and reduces tread deformation, enhancing grip, handling and heat dissipation, all contributing to a longer service life.
- Special eco-friendly wear-resistance compound reduces heat generation, enhances durability, increases mileage, and improves fuel efficiency.



Stable and Precise Handling

- Delivers excellent traction and handling on both dry and wet roads, boosting driver confidence.
- Continuous closed shoulder block design enhances handling performance and reduces irregular wear.
- Combined with a reinforced carcass design, it optimizes the contact patch and pressure distribution for longer tyre life.

ROVITTA VAN

Size	Load Index	Speed	Max. Pressure		Max. Load	
			S(kpa)	S(psi)	S(kg)	S(lb)
185R14C-8PR	102/100	R	450	65	850/800	1875/1765
195R14C-8PR	106/104	R	450	65	950/900	2094/1984
195R15C-8PR	106/104	R	450	65	950/900	2094/1984
185/75R16C-8PR	104/102	R	475	69	900/850	1984/1874
195/75R16C-8PR	107/105	R	475	69	975/925	2149/2039
205/75R16C-10PR	113/111	R	525	76	1150/1090	2535/2403
215/75R16C-10PR	116/114	R	525	76	1250/1180	2756/2601
225/75R16C-10PR	121/120	R	575	83	1450/1400	3197/3086
195/70R15C-8PR	104/102	R	450	65	900/850	1984/1874
205/70R15C-8PR	106/104	R	450	65	950/900	2094/1984
215/70R15C-8PR	109/107	R	450	65	1030/975	2271/2149
225/70R15C-8PR	112/110	R	450	65	1120/1060	2469/2337
195/65R16C-8PR	104/102	R	475	69	900/850	1984/1874
205/65R15C-6PR	102/100	R	375	54	850/800	1875/1765
205/65R16C-8PR	107/105	R	475	69	975/925	2149/2039
215/65R15C-6PR	104/102	R	375	54	900/850	1984/1874
215/65R16C-8PR	109/107	R	475	69	1030/975	2271/2149
225/65R16C-8PR	112/110	R	475	69	1120/1060	2469/2337
235/65R16C-8PR	115/113	R	475	69	1215/1150	2679/2535
195/60R16C-6PR	99/97	T	375	54	775/730	1709/1609
215/60R16C-6PR	103/101	T	375	54	875/825	1929/1819
215/60R17C-8PR	109/107	T	475	69	1030/975	2271/2149

RAGNAR A8

RIDE BEYOND LIMITS, CONQUER ALL TERRAINS

Engineered for multi-terrain exploration, balancing off-road performance with on-road comfort. Whether conquering mountains or commuting through the city, it delivers a stable and dependable driving experience.



Strong All-Terrain Traction

- Maintains excellent grip on mud, gravel, or wet surfaces, easily adapting to variable road conditions.
- A/T four-season tread pattern features a more robust tread block design for improved durability and grip.
- Small zigzag sipe design effectively provides grip on wet road surfaces and enhances driving stability.



Outstanding Stone Ejection

Efficiently discharges stones to reduce tread damage and enhance off-road driving safety.



Long-Lasting Durability

Upgraded tread compound extends tyre life, suited for frequent use.


Speed


Safety


Anti-skid


Wear



RAGNAR A8

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S(kg)	S(lb)	
245/75R16	111	T	300	44	1090	2403	400/A/A
P205/70R15	96	H	300	44	710	1565	400/A/A
225/70R16	103	T	300	44	875	1929	400/A/A
255/70R16	111	T	300	44	1090	2403	400/A/A
265/70R16	112	T	300	44	1120	2469	460/A/A
265/70R17	115	S	300	44	1215	2679	460/A/A
215/65R16	98	T	300	44	750	1653	400/A/A
215/65R17	99	T	300	44	775	1709	400/A/A
265/65R17	112	T	300	44	1120	2469	460/A/A
275/65R17	115	T	300	44	1215	2679	400/A/B
275/65R18	116	T	300	44	1250	2756	400/A/A
285/65R17	116	T	300	44	1250	2756	400/A/B
225/60R17	99	H	300	44	775	1709	400/A/A
255/60R18	112XL	T	340	50	1120	2469	400/A/A
265/60R18	110	T	300	44	1060	2337	400/A/A
285/60R18	120XL	S	340	50	1400	3086	460/A/A
275/55R20	117XL	S	340	50	1285	2833	400/A/A
285/55R20	119XL	S	340	50	1360	2998	400/A/A
265/50R20	111XL	S	340	50	1090	2403	400/A/A
285/50R20	116XL	T	340	50	1250	2756	400/A/A

Size	Load Index	Speed	Max.Pressure		Max. Load		UTQG
			S(kpa)	S(psi)	S(kg)	S(lb)	
305/50R20	120XL	S	340	50	1400	3086	400/A/A
185/75R16C-8PR	104/102	R	475	69	900/850	1984/1874	-
205R16C-8PR	110/108	S	450	65	1060/1000	2337/2205	-
215R15C-8PR	112/110	S	450	65	1120/1060	2469/2337	-
245/75R15C-6PR	109/107	S	375	54	1030/975	2271/2149	-
255/70R15C-6PR	112/110	S	375	54	1120/1060	2469/2337	-
LT215/85R16-10PR	115/112	Q	350	50	1215/1120	2679/2469	-
LT215/75R15-6PR	100/97	Q	350	50	800/730	1765/1610	-
LT235/75R15-6PR	104/101	S	350	50	900/825	1985/1820	-
LT265/75R16-10PR	123/120	Q	550	80	1550/1400	3415/3085	-
LT285/75R16-10PR	126/123	Q	550	80	1700/1550	3750/3415	-
LT245/75R17-10PR	121/118	S	550	80	1450/1320	3195/2910	-
LT245/70R16-8PR	113/110	S	450	65	1150/1060	2535/2335	-
LT265/70R16-10PR	121/118	S	550	80	1450/1320	3195/2910	-
LT245/70R17-10PR	119/116	S	550	80	1360/1250	3000/2755	-
LT285/70R17-10PR	121/118	Q	550	80	1450/1320	3195/2910	-
LT245/65R17-8PR	111/108	R	450	65	1090/1000	2403/2205	-
LT285/65R18-10PR	125/122	R	550	80	1650/1500	3640/3305	-
LT285/60R18-10PR	122/119	Q	550	80	1500/1360	3305/3000	-
31X10.50R15LT-6PR	109	S	350	50	1030	2271	-



TOLEDO

RAGNAR R9

RUGGED OFF-ROAD, READY FOR ANYTHING

RAGNAR R9 is engineered for extreme off-road conditions, delivering outstanding traction, protection, and handling across diverse terrains. Whether tackling rugged mountain trails or daily roads, it ensures a powerful, secure, and comfortable driving experience.



Speed



Safety



Anti-skid



Wear



All-Terrain Traction

- Conquers mud, gravel, and snow with enhanced grip for challenging conditions.
- Open pattern shoulder design improves the longitudinal grip of the tyres, and ensure the traction performance of mud, gravel and snow-covered roads.



Reinforced Sidewall Protection

- Shields against rock impacts, boosting durability and off-road stability.
- The staggered shoulder design, combined with a reinforced carcass, helps prevent sidewall damage from rocks and enhances off-road traction.



On-Road Comfort Meets Off-Road Power

- Balanced for both off-road performance and on-road comfort, offering all around control.
- Composite multi-pitch random arrangement design improves tyre grip and comfort, and reduce tread noise.
- Large shoulder matching small pattern block design in the middle ensures off-road performance while improving on-road comfort, delivering the perfect combination of off-road and everyday drivability.



Reliable Low-pressure Grip

- Maintains strong traction even in low-pressure and low-traction environments.
- Special under-shoulder pattern design protects the tyre shoulder and upper sidewall from damage, improves the grip of the tyre on muddy roads and in low-adhesion, low-pressure conditions.

RAGNAR R9

Size	Load Index	Speed	Max.Pressure		Max. Load	UTQG	
			S(kpa)	S(psi)	S(kg)	S(lb)	
235/75R15	109XL	Q	340	50	1030	2271	560/A/B
245/75R16	111	Q	300	44	1090	2403	560/A/B
235/70R16	109XL	Q	340	50	1030	2271	560/A/B
255/70R16	111	Q	300	44	1090	2403	560/A/B
265/70R16	116XL	Q	340	50	1250	2756	560/A/B
265/70R17	115	Q	300	44	1215	2679	560/A/B
265/65R17	116XL	Q	340	50	1250	2756	560/A/B
265/65R18	116XL	Q	340	50	1250	2756	560/A/B
275/65R18	116XL	Q	340	50	1250	2756	560/A/B
265/60R18	114XL	Q	340	50	1180	2601	560/A/B
275/60R20	116XL	Q	340	50	1250	2756	560/A/B
265/50R20	111XL	Q	340	50	1090	2403	560/A/B
285/45R22	114XL	Q	340	50	1180	2601	560/A/B
LT245/75R16-10PR	120/116	Q	550	80	1380/1260	3042/2778	-
LT265/75R16-8PR	119/116	Q	450	65	1360/1250	3000/2755	-

Size	Load Index	Speed	Max.Pressure		Max. Load	UTQG	
			S(kpa)	S(psi)	S(kg)	S(lb)	
LT285/75R16-6PR	116/113	Q	350	50	1250/1150	2755/2535	-
LT265/70R17-8PR	118/115	Q	450	65	1320/1215	2910/2680	-
LT285/70R17-6PR	116/113	Q	350	50	1250/1150	2755/2535	-
LT285/65R18-8PR	121/118	Q	450	65	1450/1320	3195/2910	-
LT285/55R20-8PR	117/114	Q	450	65	1285/1180	2835/2600	-
27X8.50R14LT-6PR	95	Q	350	50	690	1521	-
31X10.50R15LT-6PR	109	Q	350	50	1030	2271	-
33X12.50R15LT-6PR	108	Q	250	35	1000	2205	-
33X12.50R18LT-10PR	118	Q	450	65	1320	2910	-
33X12.50R20LT-10PR	114	Q	450	65	1180	2601	-
33X12.50R22LT-10PR	109	Q	450	65	1030	2271	-
35X12.50R17LT-10PR	121	Q	450	65	1450	3197	-
35X12.50R18LT-8PR	118	Q	350	50	1320	2910	-
35X12.50R20LT-10PR	121	Q	450	65	1450	3197	-
35X12.50R22LT-10PR	117	Q	450	65	1285	2833	-